



MICROPHONE CABLE

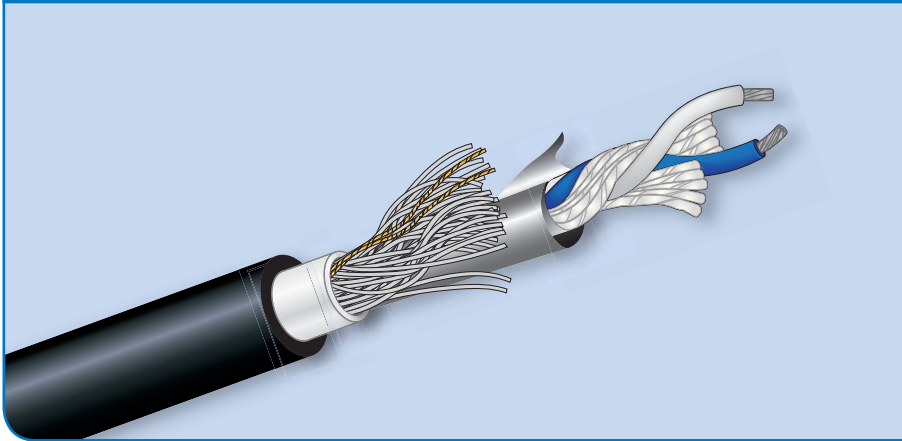

GENERAL CHARACTERISTICS

Model	APH-CA-A-BLK	
Cable	O.D.	6.5mm±0.15mm
	Standard reels	100m / 300m
	Weight (kg/100m)	7.50kg/100m
	Operating temperature	60 °C
Jacket	Material	PVC / Double Jacket
	Color	Black
	Nom. Thick.	1.55mm
Spiral Shield	Material	Spiral
	Coverage	>85%
Foil Shield	Material	Foil
	Coverage	125%
Conductor	Q'ty	2
	Strand	80 x 0.08mm
	Area / AWG	21AWG
	Insul. O.D.	1.6mm±0.1mm
	Material	Tinned Copper Wire + Tinsel Wire

ELECTRICAL CHARACTERISTICS

Dielectric Strength (V AC/min.)		1000V AC/0.15sec MIN
D.C.R. at 20 °C	Conductor ($\Omega/100m$)	4.2 $\Omega/100M$
	Shield ($\Omega/100m$)	3.33 $\Omega/100M$
Capacitance	CDR/CDR 1 kHz (pF/m)	136pF/m±5pF
	CDR/SCR 1 kHz (pF/m)	149pF/m±5pF
Nominal Impedance 1 kHz ($\Omega/100m$)		33 $\Omega/100m$