



## MICROPHONE CABLE

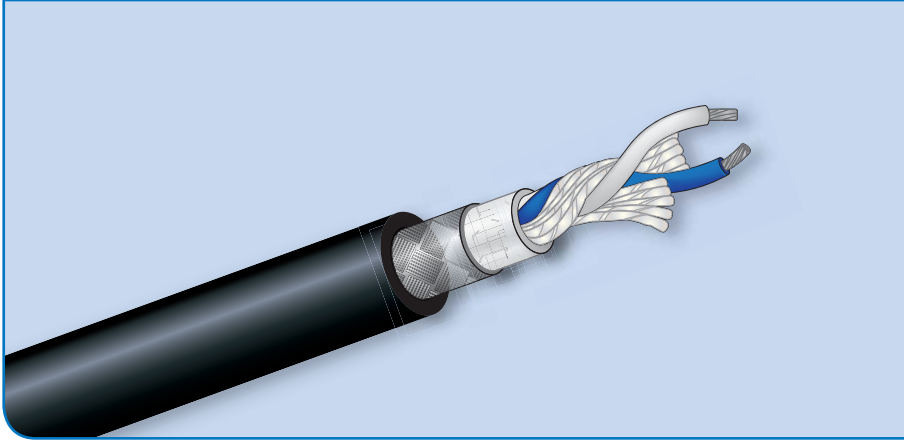

### GENERAL CHARACTERISTICS

Model	APH-MIC-B022	
<b>Cable</b>	O.D.	6.2mm±0.15mm
	Standard reels	100m / 300m
	Weight (kg/100m)	4.7kg/100m
	Operating temperature	60 °C
<b>Jacket</b>	Material	PVC
	Color	Black
	Nom. Thick.	1.1mm
<b>Braid Shield</b>	Material	Braid
	Coverage	95%
<b>Paper Shield</b>	Material	Paper
	Coverage	125%
<b>Conductor</b>	Q'ty	2
	Strand	40 x 0.1mm
	Area / AWG	22AWG
	Insul. O.D.	1.7mm± 0.1mm
	Material	Tinned Copper Wire

### ELECTRICAL CHARACTERISTICS

Dielectric Strength (V AC/min.)	1000V AC/0.15sec MIN	
D.C.R. at 20 °C	Conductor ( $\Omega$ /100m)	5.86 $\Omega$ /100M
	Shield ( $\Omega$ /100m)	1.66 $\Omega$ /100M
<b>Capacitance</b>	CDR/CDR 1 kHz (pF/m)	55pF/m±5pF
	CDR/SCR 1 kHz (pF/m)	61pF/m±5pF
Nominal Impedance 1 kHz ( $\Omega$ /100m)	81 $\Omega$ /100m	