


## LCD Projectors

Specifications																	
Model name	CP-X4042WN	CP-X3542WN	CP-X3042WN	CP-X2542WN	CP-WX4042WNC	CP-WX3042WN	CP-EX302N	CP-EX252N	CP-EW302N	CP-EX402	CP-EX302	CP-EX252	CP-EW302				
Display system	3LCD				3LCD				3LCD								
Display device	0.63", aspect ratio 4:3 786,432 pixels H: 1024 x V: 768 (XGA)				0.59", aspect ratio 16:10 1,024,000 pixels H: 1280 x V: 800 (WXGA)				0.63", aspect ratio 4:3 786,432 pixels H: 1024 x V: 768 (XGA)				0.59", aspect ratio 16:10 1,024,000 pixels H: 1280 x V: 800 (WXGA)				
Lens	Manual (x1.2)				Manual (x1.2)				Manual (x1.2)								
Light source	225W lamp				225W lamp				225W lamp								
Screen size	30 - 300 inch				30 - 300 inch				30 - 300 inch								
Light output (Brightness)	4,200lm	3,700lm	3,200lm	2,700lm	4,000lm	3,000lm	3,200lm	2,700lm	3,000lm	4,200lm	3,200lm	2,700lm	3,000lm				
Contrast ratio (full white/full black)	10,000 : 1	16,000 : 1	10,000 : 1		10,000 : 1		2,000 : 1		2,000 : 1								
Speaker	16W x 1 mono				16W x 1 mono				1W x 1 mono								
Displayable scanning frequency	Horizontal: 15 - 106 kHz Vertical: 50 - 120 Hz				Horizontal: 15 - 106 kHz Vertical: 50 - 120 Hz				Horizontal: 15 - 106 kHz Vertical: 50 - 120 Hz								
Display resolution	Computer: VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+*, WSXGA+*, UXGA, Full HD, Mac 16" Video: NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, PAL(60Hz), 480i@60, 480p@60, 576i@50, 576p@50, 720p@50/60, 1080i@50/60, 1080p@50/60																
Terminals	COMPUTER IN: Mini-D-sub 15-pin connector x 2 MONITOR OUT: Mini-D-sub 15-pin connector x 1 (shared with COMPUTER IN2) VIDEO IN: RCA connector x 1 HDMI IN: HDMI (HDCP compliant) x 2 * HDMI 2 supports MHL input. AUDIO IN: 3.5mm stereo mini connector x 2, 2RCA connector L/R x 1 AUDIO OUT: 3.5mm stereo mini connector x 1 Microphone Input: 3.5mm mono mini connector x 1 Control (RS232C): D-sub 9-pin connector x 1 LAN: RJ45 connector x 1 USB-A: USB type A x 2 (PC-LESS Presentation or Wireless LAN (option)) USB-B: USB type B x 1 (USB display or USB mouse control)				Mini-D-sub 15-pin connector x 2 Mini-D-sub 15-pin connector x 1 (shared with COMPUTER IN2) RCA connector x 1 HDMI (HDCP compliant) x 1 3.5mm stereo mini jack x 2, RCA jack L/R x 1 3.5mm stereo mini jack x 1 - D-sub 9-pin connector x 1 RJ45 connector x 1 -				Mini-D-sub 15-pin connector x 2 Mini-D-sub 15-pin connector x 1 (shared with COMPUTER IN2) RCA connector x 1 HDMI (HDCP compliant) x 1 RCA jack L/R x 1 RCA jack L/R x 1 -								
Operating temperature	5 - 35°C				5 - 35°C				5 - 35°C								
Operating humidity	10 - 90%RH (non-condensing)				10 - 90%RH (non-condensing)				10 - 90%RH (non-condensing)								
Power requirements	AC 100V - 120V (50 / 60Hz) : 3.4A				AC 220V - 240V (50 / 60Hz) : 1.7A				AC 100V - 120V (50 / 60Hz) : 3.3A AC 220V - 240V (50 / 60Hz) : 1.6A								
Power consumption	AC 100V - 120V (50 / 60Hz) : 330W				AC 220V - 240V (50 / 60Hz) : 310W				AC 100V - 120V (50 / 60Hz) : 320W AC 220V - 240V (50 / 60Hz) : 300W								
Standby mode power consumption	Less than 0.5W at saving mode				Less than 0.5W at saving mode				Less than 0.5W at saving mode								
Dimensions (W x H x D)	323 x 95 x 245mm (12.7" x 3.7" x 9.6") (Including protrusions) 320 x 85 x 245mm (12.6" x 3.3" x 9.6") (Excluding protrusions)				323 x 95 x 245mm (12.7" x 3.7" x 9.6") (Including protrusions) 320 x 85 x 245mm (12.6" x 3.3" x 9.6") (Excluding protrusions)				323 x 95 x 245mm (12.7" x 3.7" x 9.6") (Including protrusions) 320 x 85 x 245mm (12.6" x 3.3" x 9.6") (Excluding protrusions)								
Weight	Approx. 3.0kg (6.6lbs.)				Approx. 3.0kg (6.6lbs.)				Approx. 2.9kg (6.4lbs.)								
Accessories	Power cord (1.8m), Computer cable (2.0m), Remote control, AA batteries, Lens cover, Adapter cover, Security label, User's manuals (Book, CD), Application CD				Power cord (1.8m), Computer cable (2.0m), Remote control, AA batteries, Security label, User's manuals (Book, CD)				Power cord (1.8m), Computer cable (2.0m), Remote control, AA batteries, Security label, User's manuals (Book, CD)								
Option Parts	Lamp : DT01481 Filter set : UX38841 USB wireless adapter USB-WL-11N *3				HAS-304H (Fixing adapter for high ceilings) HAS-204L (Fixing adapter for low ceilings) HAS-EX300 (Bracket for ceiling mount)				Lamp : DT01481 Filter set : UX38841				HAS-304H (Fixing adapter for high ceilings) HAS-204L (Fixing adapter for low ceilings) HAS-EX300 (Bracket for ceiling mount)				

\*1: Only for CP-X4042WN, CP-X3542WN, CP-X3042WN, CP-X2542WN, CP-EX302N, CP-EX252N, CP-EX402, CP-EX302, CP-EX252 \*2: Only for CP-WX4042WN, CP-WX3042WN, CP-EW302N, CP-EW302  
\*3: The availability of the USB-WL-11N varies depending on the country and the region.

### Projection Distance

#### On a horizontal surface



#### CP-X4042WN / CP-X3542WN / CP-EX402

(1,024 x 768) (±10%)									
a Screen size (diagonal)		b Projection distance		c1 Screen height		c2 Screen height			
type	min.	max.	min.	max.	min.	max.	min.	max.	
(inch)	m	inch	m	inch	cm	inch	cm	inch	
60	1.5	1.8	70	2.1	84	78	31	13	5
80	2.0	2.4	94	2.9	113	105	41	17	7
100	2.5	3.0	118	3.6	142	131	51	22	9
120	3.0	3.6	142	4.3	170	157	62	26	10
150	3.8	4.5	177	5.4	214	196	77	33	13
200	5.1	6.0	237	7.3	286	261	103	44	17

#### CP-WX4042WN

(1,280 x 800) (±10%)									
a Screen size (diagonal)		b Projection distance		c1 Screen height		c2 Screen height			
type	min.	max.	min.	max.	min.	max.	min.	max.	
(inch)	m	inch	m	inch	cm	inch	cm	inch	
60	1.5	1.9	74	2.3	89	75	30	6	2
80	2.0	2.5	99	3.0	120	100	39	8	3
100	2.5	3.2	125	3.8	150	125	49	10	4
120	3.0	3.8	150	4.6	181	150	59	12	5
150	3.8	4.8	188	5.8	227	188	74	14	6
200	5.1	6.4	252	7.7	303	250	98	19	8


#### CP-X3042WN / CP-X2542WN / CP-EX302N / CP-EX252N / CP-EX302 / CP-EX252

(1,024 x 768) (±10%)									
a Screen size (diagonal)		b Projection distance		c1 Screen height		c2 Screen height			
type	min.	max.	min.	max.	min.	max.	min.	max.	
(inch)	m	inch	m	inch	cm	inch	cm	inch	
60	1.5	1.8	70	2.1	84	78	31	13	5
80	2.0	2.4	94	2.9	113	105	41	17	7
100	2.5	3.0	118	3.6	142	131	51	22	9
120	3.0	3.6	142	4.3	170	157	62	26	10
150	3.8	4.5	177	5.4	213	196	77	33	13
200	5.1	6.0	237	7.2	285	261	103	44	17


#### CP-WX3042WN / CP-EW302N / CP-EW302

(1,280 x 800) (±10%)									
a Screen size (diagonal)		b Projection distance		c1 Screen height		c2 Screen height			
type	min.	max.	min.	max.	min.	max.	min.	max.	
(inch)	m	inch	m	inch	cm	inch	cm	inch	
60	1.5	1.9	74	2.3	89	75	30	6	2
80	2.0	2.5	99	3.0	120	100	39	8	3
100	2.5	3.2	125	3.8	150	125	49	10	4
120	3.0	3.8	150	4.6	181	150	59	12	5
150	3.8	4.8	188	5.8	227	188	74	14	6
200	5.1	6.4	252	7.7	303	250	98	19	8

#### Suspended from the ceiling



### Dimensions

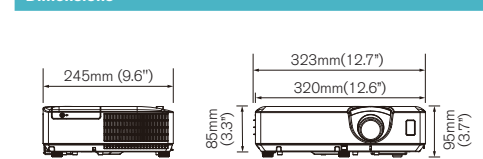

### Environment

- **Compliance with EU Directive RoHS<sup>1</sup>**
  - **Reduction of resin usage in production**  
Use of hot runners in molds for making upper housing in order to reduce mill ends.
  - **Reduction of CO<sub>2</sub> emissions**  
Carton volume has been cut down to 65%<sup>2</sup>, reducing CO<sub>2</sub> emissions during transport.
  - **Power saving mode engaged during standby**
  - **Eco mode**  
Eco mode provides power saving.
- <sup>1</sup> RoHS is the acronym of "Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment".  
<sup>2</sup> Compared to Hitachi CP-X2515WN network capable projector on the basis of one carton box.

—Design and specifications are subject to change without notice.

\* The projected images and comparison photos in this catalog are simulations. \* LCD panels, polarizers and other optical components and cooling fans may need replacement after prolonged usage. For more details, please consult a Hitachi sales representative. \* Do not use in places where there is a lot of water, dampness, steam, dust, soot or tobacco smoke. This may result in fire or malfunction. \* Optical components (lamp, LCD panel, polarizing plate, PBS [polarizer beam splitter]) have limited service lives. They must be repaired or replaced if they are used for a long period of time. \* These projectors use a mercury lamp with high internal pressure. Because of its properties, this lamp may burst with a loud noise or burn out if struck or after it has been used for a period of time. The time until it bursts or burns out varies greatly according to differences between lamps and usage conditions. Turning the lamp's power on and off frequently shortens its service life. \* Optical components other than the lamp: If the projector is used for six hours or more per day, they may need to be replaced in less than a year. \* LCD panel: If the projector is used continuously for six hours or more, its replacement cycle may be shortened. \* Do not turn projector on again for ten minutes after shutdown. Neglect can shorten the lifetime or the lamp. During use and immediately after use, do not touch anywhere near the lamp and the vents as these parts are extremely hot. \* Windows<sup>®</sup> is a trademark, or a registered trademark of Microsoft Corporation in the United States and/or other countries. \* Crestron Connected and the Crestron Connected Logo are registered trademarks of Crestron Electronics. \* MHL, the MHL logo, and Mobile High-Definition Link are trademarks or registered trademarks of MHL, LLC in the United States and other countries. \* HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. \* ImageCare is a trademark or a registered trademark of Philips Lighting Holding B.V. in the United States and other countries. \* All other trademarks are the properties of their respective owners.




## HITACHI

**Hitachi America, Ltd., Digital Media Division** 2420 Fenton Street, Suite 200 Chula Vista, CA 91914, U.S.A. and Canada Tel: +1-800-225-1741 www.hitachi-america.us/digitalmedia  
**Hitachi Home Electronics Asia (S) Pte. Ltd.** 438A Alexandra Road #01-01/02/03, Alexandra Technopark, 119967, Singapore Tel: +65-6536-2520 www.hitachiconsumer.com.sg  
**Hitachi Sales (Malaysia) Sdn. Bhd.** Lot 12, Jalan Kemajuan, Bangi Industrial Estate, 43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia Tel: +60-3-8911-2670 www.hitachiconsumer.com.my  
**Hitachi Sales (Thailand), Ltd.** 994, 996 Soi Thonglor, Sukhumvit 55 Road, Klongtonnu, Vadhana Bangkok 10110, Thailand Tel: +66-2335-5455 www.hitachi-th.com  
**Hitachi (Hong Kong), Ltd.** 18th Floor, Ever Gain Centre, 28 On Muk Street, Shatin, N.T., Hong Kong Tel: +852-2113-8883 www.hitachi-hk.com.hk  
**Hitachi Sales Corp. of Taiwan** 2nd Floor, No.65, Nanking East Road, Section 3, Taipei 104, Taiwan Tel: +886-2-2516-0500 www.hsct.com.tw  
**Hitachi Australia Pty Ltd.** Suite 801, Level 8, 123 Epping Road, North Ryde NSW 2113, Australia Tel: +61-2-9888-4100 www.hitachi.com.au  
**Hitachi Europe Ltd., Digital Media Group Consumer Affairs Department** Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire, SL6 8YA, UK Tel: +44-1628-585000 www.hitachidigitalmedia.com  
**Hitachi Maxell, Ltd.** 5030 Totsuka-cho, Totsuka-ku Yokohama, 244-0003, Japan http://www.hitachi.co.jp/proj/

April 2017

NM-E419 042017

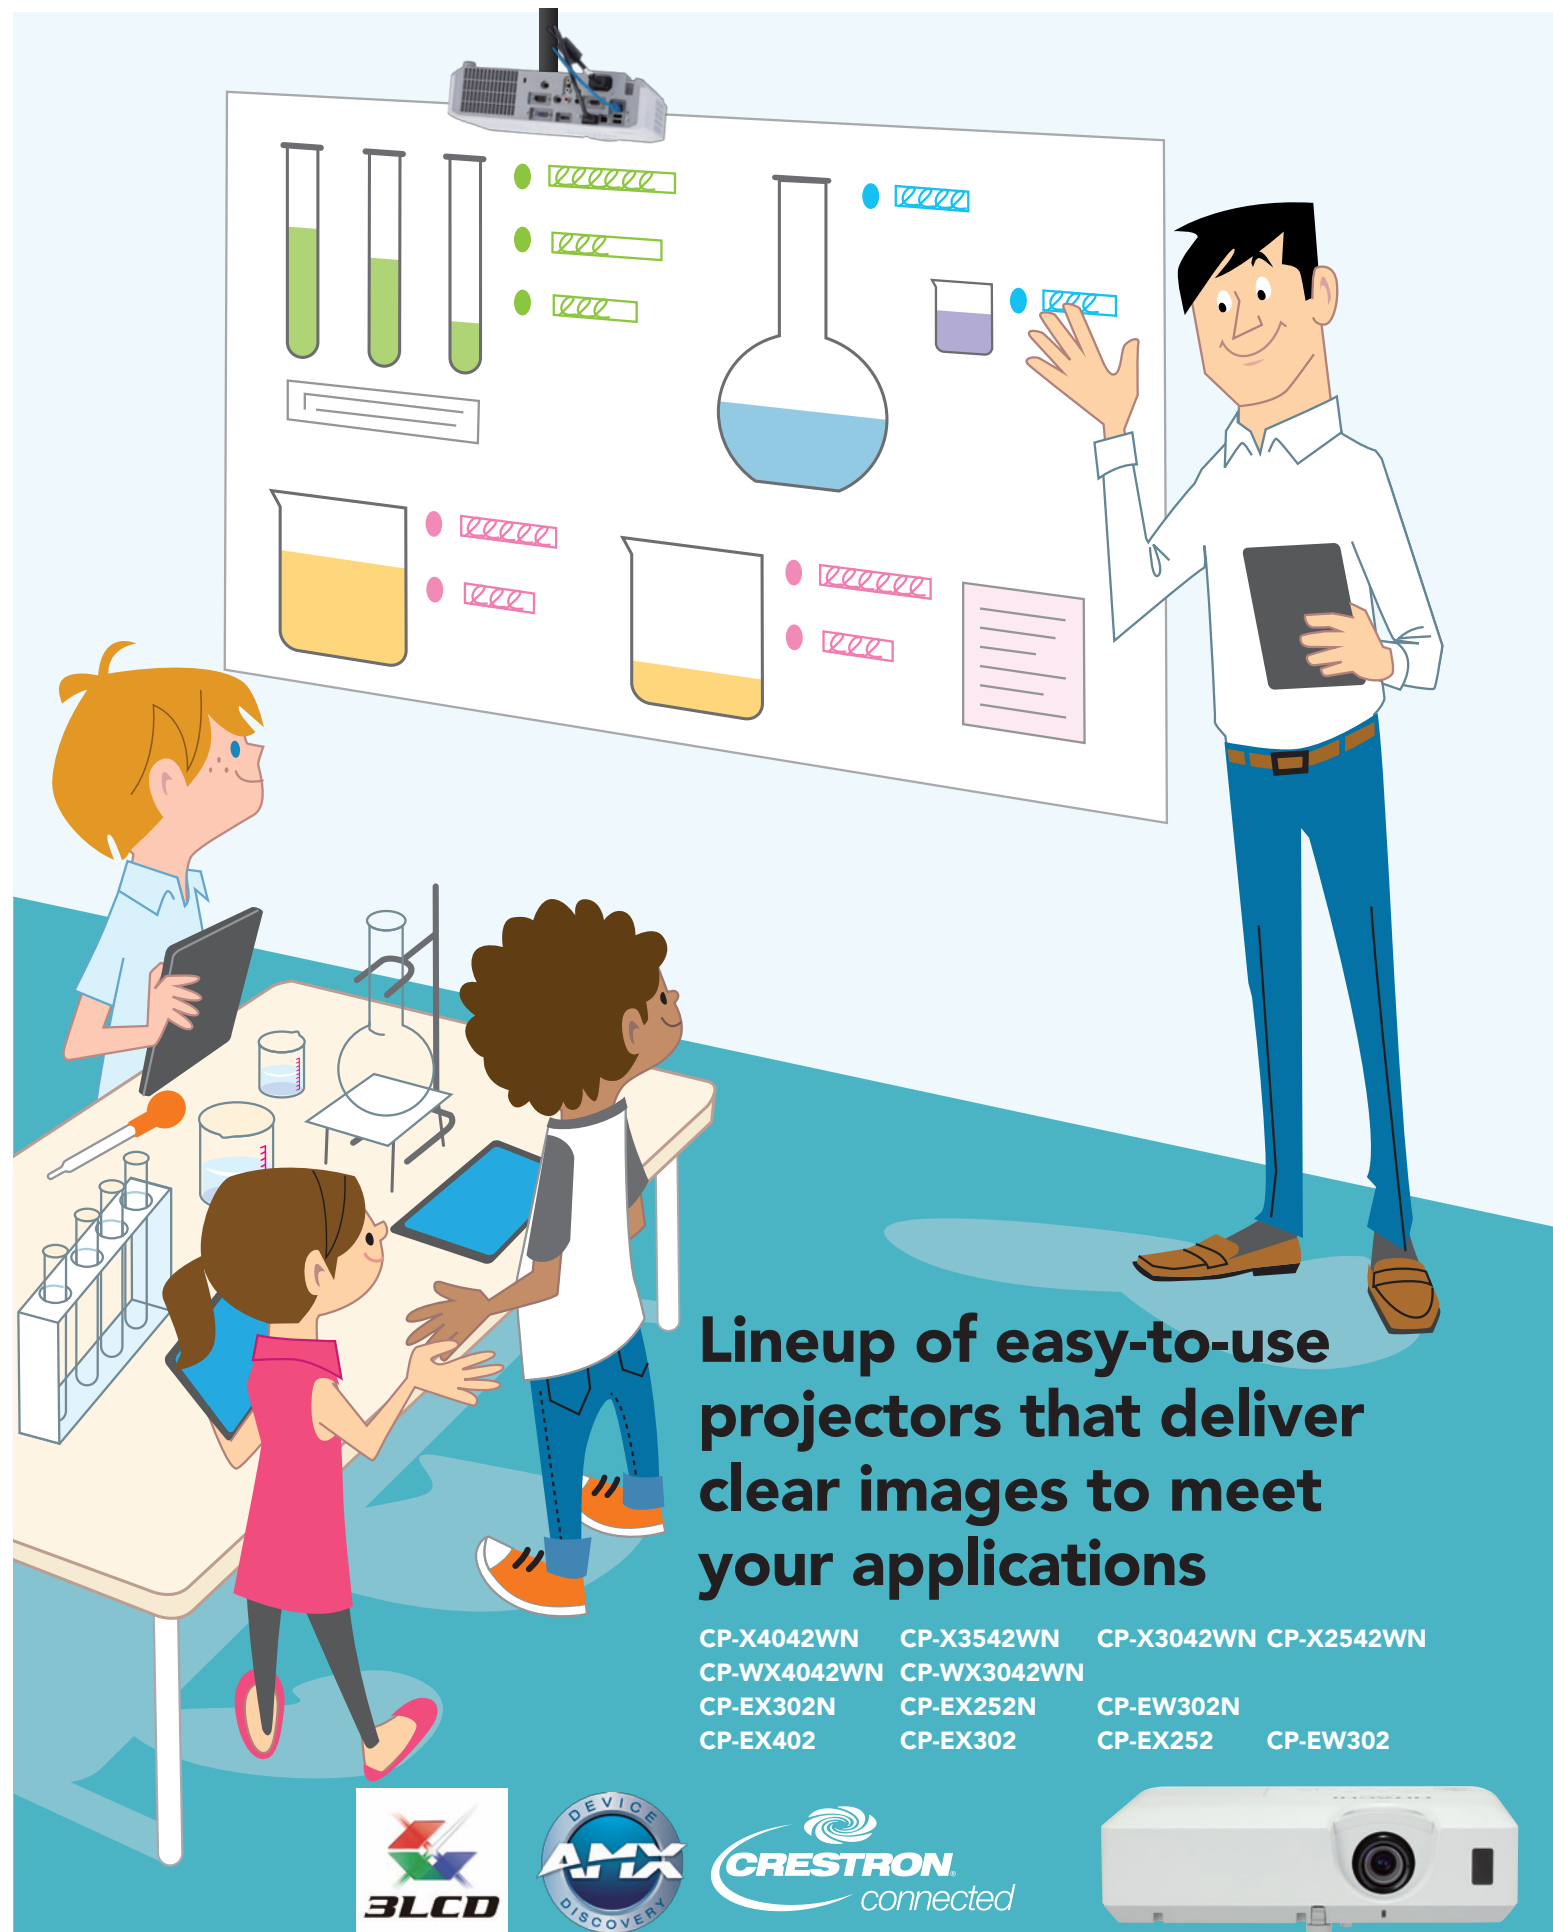

## Lineup of easy-to-use projectors that deliver clear images to meet your applications


- CP-X4042WN
- CP-X3542WN
- CP-X3042WN
- CP-X2542WN
- CP-WX4042WN
- CP-WX3042WN
- CP-EX302N
- CP-EX252N
- CP-EW302N
- CP-EX402
- CP-EX302
- CP-EX252
- CP-EW302



\*Projected images are simulations CP-EX402, CP-EX302, CP-EX252 and CP-EW302 do not support AMX Device Discovery and Crestron Connected.

## ACCENTUALIZER and HDCR

ACCENTUALIZER makes pictures look more real by enhancing shade, sharpness, and gloss, to make pictures clearer. The HDCR function corrects blurred images caused by room lighting or outside light sources and creates an effect similar to increasing contrast resulting in clear images even in bright rooms.

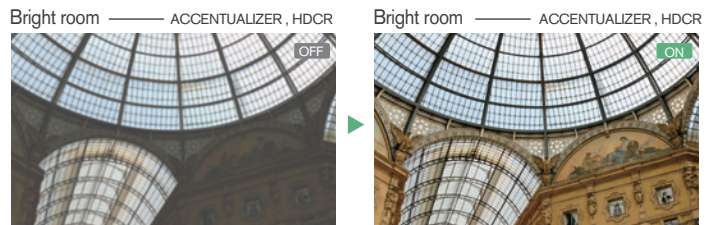


Bright room — ACCENTUALIZER, HDCR OFF (Left) / ACCENTUALIZER, HDCR ON (Right)

## Image Optimizer

Equipped with IMAGE OPTIMIZER, Hitachi's original function that maintains visibility of an image through automatic image correction in accordance with lamp consumption.

• This function may not work properly when HDCR/ACCENTUALIZER is ON.

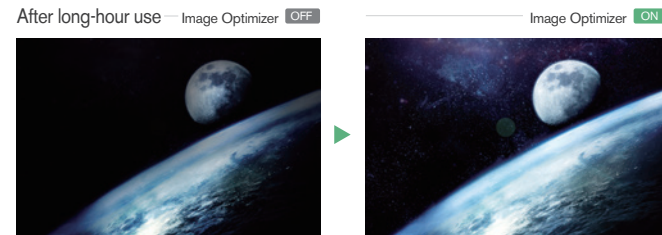

After long-hour use — Image Optimizer OFF (Left) / Image Optimizer ON (Right)

# LINE UP

\* Local availability may be limited.

## Advanced features & network functions



CP-X4042WN  
XGA 4,200lm

CP-X3542WN  
XGA 3,700lm

CP-X3042WN  
XGA 3,200lm

CP-X2542WN  
XGA 2,700lm

CP-WX4042WN  
WXGA 4,000lm

CP-WX3042WN  
WXGA 3,000lm

## Convenient features & network functions



CP-EX302N  
XGA 3,200lm

CP-EX252N  
XGA 2,700lm

CP-EW302N  
WXGA 3,000lm

## Basic features



CP-EX402  
XGA 4,200lm

CP-EX302  
XGA 3,200lm


CP-EX252  
XGA 2,700lm

CP-EW302  
WXGA 3,000lm

## Network Function / Capability


### Wireless Capability (Option)

The projector is capable of a wireless network with the optional USB wireless adapter that supports IEEE802.11b/g/n. You can control the projector with a computer via the network, and also project the screen of the computer on which the LiveViewer software is installed.

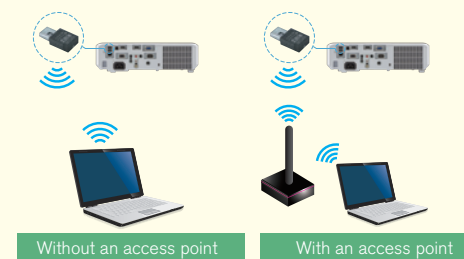


### Multi Projector\*1

You can project the same image from up to 12\*2 projectors simultaneously. This is useful for meetings and lectures in large venues where a single screen would not be sufficient.

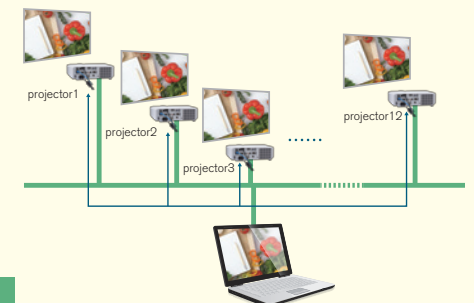

### Moderator Control Mode\*1

Setting one computer from the multiple computers (up to 50\*3) that are connected to the projector as the moderator (host) makes it possible for the moderator to project from all the computers (clients).

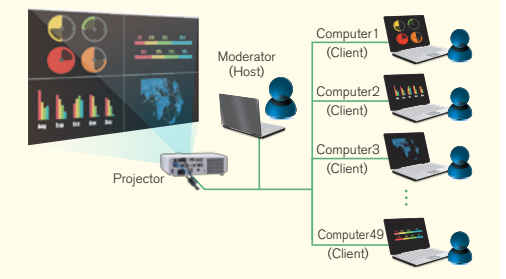

### Projector Quick Connection


You can project images, documents, photos from a tablet or a smartphone on which Projector Quick Connection, the dedicated online application software developed by Hitachi, has been installed. The software allows you to control the projector with the devices.

\* See the Hitachi website for details  
[http://www.hitachi.co.jp/proj/en/apps/pj\\_connection.html](http://www.hitachi.co.jp/proj/en/apps/pj_connection.html)



### Projector Monitoring and Control from a Remote Location


Hitachi's Projector Management Software (PJMan) gives you the ability to control, diagnose and manage (monitor the status including power, lamp hours, and temperature and air filter conditions) a single or group of Hitachi projectors.

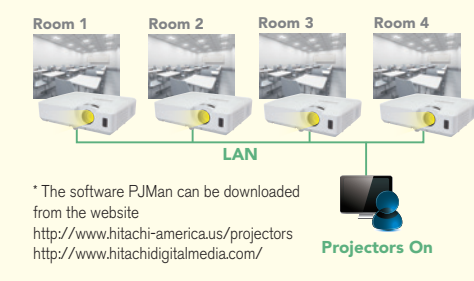

\* The software PJMan can be downloaded from the website  
<http://www.hitachi-america.us/projectors>  
<http://www.hitachidigitalmedia.com/>

### E-mail Alerts

E-mail notification is sent for routine maintenance and error conditions.

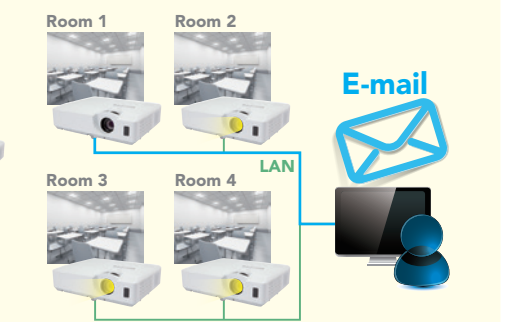




\*1 To secure better performance, a wired network is preferable. Required to install the LiveViewer software from the bundled CD-ROM on all the computers. The functions are supported by LiveViewer (Windows® application) only.  
\*2 Image transfer speed may vary depending on number of projectors connected. \*3 Image and audio transfer speed may vary depending on number of computers connected.

## Terminals

CP-X4042WN, CP-X3542WN, CP-X3042WN, CP-X2542WN, CP-WX4042WN, CP-WX3042WN

CP-EX302N, CP-EX252N, CP-EW302N

CP-EX402, CP-EX302, CP-EX252, CP-EW302

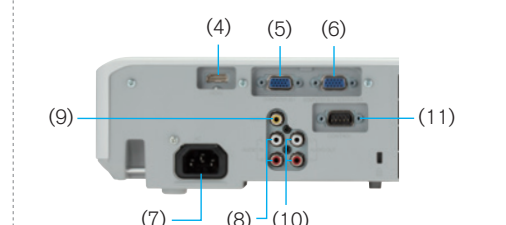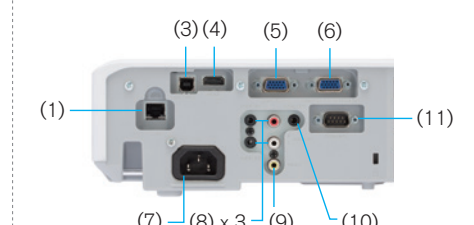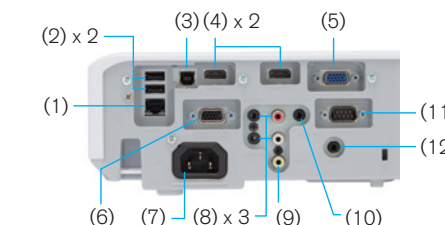


(1):LAN (2):USB-A (3):USB-B (4):HDMI (5):COMPUTER IN1 (6):COMPUTER IN2 / MONITOR OUT (7):AC IN (8):AUDIO IN (9):VIDEO (10):AUDIO OUT (11):CONTROL (12):MIC

Notes • Comparison photos are simulations. • The images in this catalog are representations of the effects and differ from actual images.

## High Contrast Ratio

## 2 HDMI inputs

Equipped with 2 HDMI input terminals for the current widely-used interface.



**HDMI**  
HIGH-DEFINITION MULTIMEDIA INTERFACE

\*CP-EX302N, CP-EX252N, CP-EW302N, CP-EX402, CP-EX302, CP-EX252, and CP-EW302 have one HDMI input terminal.

## MIC Input\*1 and 16W Internal Speaker

The projectors are equipped with a microphone input, so you can use the microphone system, even when the projector is in standby.\*2 These projectors also have a built-in 16-watt high power speaker.

\*1 MIC input terminal is mounted on CP-X4042WN, CP-X3542WN, CP-X3042WN, CP-X2542WN, CP-WX4042WN, and CP-WX3042WN only.  
\*2 Not available while the STANDBY MODE is set to SAVING.




## MHL® connectivity

The projectors' HDMI2 input terminal supports the MHL (Mobile High-Definition Link). This feature allows you to mirror the screen of your MHL-enabled smartphone / tablet on a projected screen.




## Easy Schedule Setting

You can schedule routine and special projector events, including power on, power off, input selection and other settings.

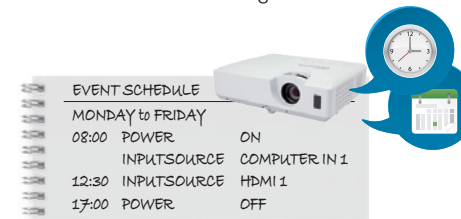

## Saver Mode

This feature developed by Hitachi, based on ImageCare® technology, reduces the lamp brightness and power consumption, resulting in considerable energy savings. The saver mode automatically activates when the projected image does not change in the preset time (1 to 30 minutes). You can also activate the saver mode manually with the remote controller.

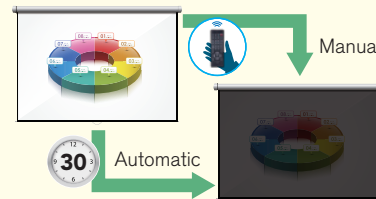


## Intelligent Eco Mode

This feature developed by Hitachi, based on ImageCare® technology, automatically changes the lamp brightness according to the input signal level. The lamp brightness is reduced when a darker image is projected, and returns to normal when a brighter image is projected, eliminating unnecessary energy consumption from the lamp.



## Perfect fit

Equipped with Perfect fit with which the position of four corners and four sides of a projected image can be adjusted. With the remote controller at hand, you can quickly correct the distorted image such as pincushion or barrel.



## Easy Maintenance

The lamp door is on the top and the filter cover is on the side, so maintenance and replacement of these parts can be done easily.



## Other Useful Features

- Auto Vertical Keystone Correction
- Horizontal Keystone Correction
- PC-less Presentation • USB Display
- Compatible with AMX Device Discovery
- Compatible with Crestron Room View®
- Network Bridge
- Auto Eco Mode • Audio Pass Through
- Direct Power On/Off • MyScreen
- My Button • My Memory
- Closed Caption • Security Pin Lock System

For CP-X4042WN, CP-X3542WN, CP-X3042WN, CP-X2542WN, CP-WX4042WN, CP-WX3042WN For CP-EX302N, CP-EX252N, CP-EW302N For CP-EX402, CP-EX302, CP-EX252, CP-EW302