
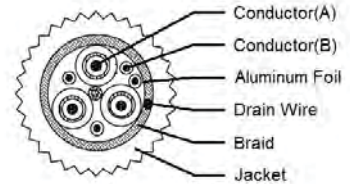


RGB COXIAL CABLE

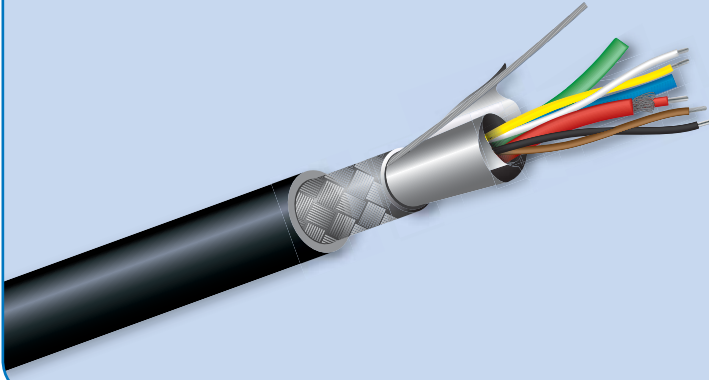

GENERAL CHARACTERISTICS

Model		APH-RGB3+4	
Cable	O.D.	9.0±0.2mm	
	Standard reels	100M	
	Weight (kg/100m)	12.60kg/100m	
	Operating temperature	80 °C	
Jacket	Material	PVC	
	Nom. Thick.	0.95mm	
Braid Shield	Material	Braid	
	Coverage	95%↑	
Foil Shield	Material	Foil	
	Coverage	125%	
Conductor		A	B
	Q'ty	3 Coax	4 Control
	Jacket OD	2.55±0.1mm	-
	Jacket Material	PVC	-
	Nom. Thick.	0.355mm	-
	Shield / Material	Spiral - TC	-
	Coverage	95%↑	-
	Strand	7 x 0.127mm	7 x 0.2mm
	Area / AWG	28 AWG	24 AWG
	Delect. O.D.	1.6±0.1mm	1.1±0.1mm
Material	Tinned Copper Wire		

ELECTRICAL CHARACTERISTICS

Dielectric Strength (V AC/min.)		1000V AC/0.15sec MIN	1000V AC/0.15sec MIN
D.C.R. at 20 °C	Conductor (Ω /100m)	21.3 Ω /100M	8.42 Ω /100M
Nominal Impedance (Ω)		75 Ω /100m	-
Attenuance	1 MHz (dB/100m)		
	5 MHz (dB/100m)		
	10 MHz (dB/100m)		
	50 MHz (dB/100m)		
	100 MHz (dB/100m)		
	180 MHz (dB/100m)		
	400 MHz (dB/100m)		