



SPEAKER CABLE

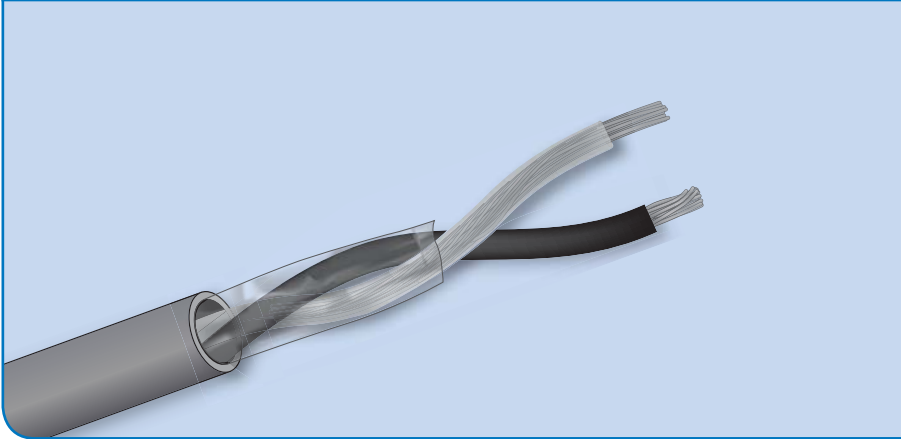

GENERAL CHARACTERISTICS

Model		APH-SPC-014	APH-SPC-016	APH-SPC-018
Cable	O.D.	9.8±0.2mm	8.8±0.2mm	6.4±0.2mm
	Standard reels		100M / 300M	
	Weight (kg/100m)	12kg/100m	8.5kg/100m	5kg/100m
	Operating temperature	-20 °C~+80 °C	-20 °C~+80 °C	-20 °C~+80 °C
Jacket	Material		PVC	
	Color		Gray	
	Nom. Thick.	1.4mm	1.3mm	1.1mm
Shield	Material		Mylar	
	Coverage		125%	
Conductor	Q'ty		2	
	Strand	42 x 0.254mm	26 x 0.254mm	16 x 0.254mm
	Area / AWG	14AWG	16AWG	18AWG
	Insul. O.D.	3.5mm±0.1mm	3.1mm±0.1mm	2.1mm±0.1mm
	Material		Tinned Copper Wire	

ELECTRICAL CHARACTERISTICS

Dielectric Strength (V AC/min.)		1000V AC/0.15sec MIN		
D.C.R. at 20 °C	Conductor (Ω /100m)	0.83 Ω /100M	1.32 Ω /100M	2.09 Ω /100M
Capacitance	CDR/CDR 1 kHz (pF/m)	81pF/m±5pF	64pF/m±5pF	68pF/m±5pF