



## SPEAKER CABLE

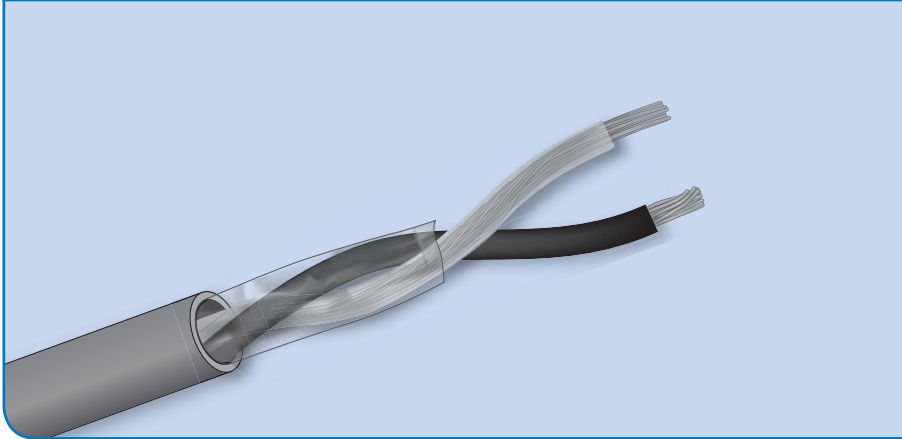

### GENERAL CHARACTERISTICS

Model		APH-SPC-014	APH-SPC-016	APH-SPC-018
<b>Cable</b>	O.D.	9.8±0.2mm	8.8±0.2mm	6.4±0.2mm
	Standard reels		100M / 300M	
	Weight (kg/100m)	12kg/100m	8.5kg/100m	5kg/100m
	Operating temperature	-20 °C~+80 °C	-20 °C~+80 °C	-20 °C~+80 °C
<b>Jacket</b>	Material		PVC	
	Color		Gray	
	Nom. Thick.	1.4mm	1.3mm	1.1mm
<b>Shield</b>	Material		Mylar	
	Coverage		125%	
<b>Conductor</b>	Q'ty		2	
	Strand	42 x 0.254mm	26 x 0.254mm	16 x 0.254mm
	Area / AWG	14AWG	16AWG	18AWG
	Insul. O.D.	3.5mm±0.1mm	3.1mm±0.1mm	2.1mm±0.1mm
	Material		Tinned Copper Wire	

### ELECTRICAL CHARACTERISTICS

Dielectric Strength (V AC/min.)		1000V AC/0.15sec MIN		
<b>D.C.R. at 20 °C</b>	Conductor ( $\Omega$ /100m)	0.83 $\Omega$ /100M	1.32 $\Omega$ /100M	2.09 $\Omega$ /100M
<b>Capacitance</b>	CDR/CDR 1 kHz (pF/m)	81pF/m±5pF	64pF/m±5pF	68pF/m±5pF