
## HIGH BRIGHTNESS LASER PROJECTORS EB-L1100U/1200U/1405U/1505U





The Epson EB-L1000 series projector is designed to deliver unyielding laser performance, from any position to most surfaces, up to 20,000 long lasting hours – maintenance-free. Project 4K enhanced resolutions in confident colours with the intuitive colour correction system that compensates for uneven colour surfaces and screens. With Epson, hassle-free and reliable projections are made possible.



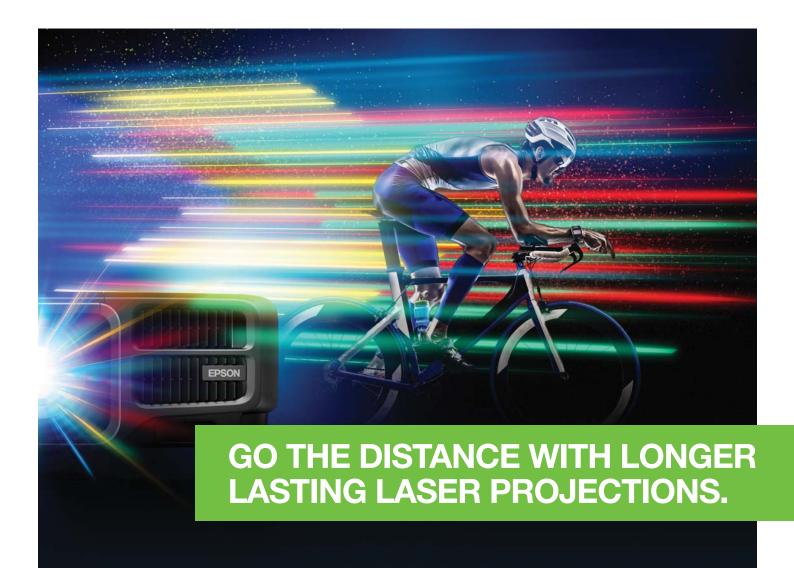



EB-L1405U / EB-L1505U



# **ENGINEERED FOR BUSINESS**

#### **Unparalleled Performance**

Guaranteed 20,000 hours of maintenance-free projections with laser light source supported by fully inorganic display engine.

#### Confident Colours, Greater Details


ASER

Detect and correct uneven screen colours, to project 4K enhanced images in magnificent hues and brilliant white, with the built-in camera.

#### Adaptive Projections

With the optional ultra short throw lens, rotate 360° and project on wide-curved, angled surfaces to create astounding images even in small spaces.



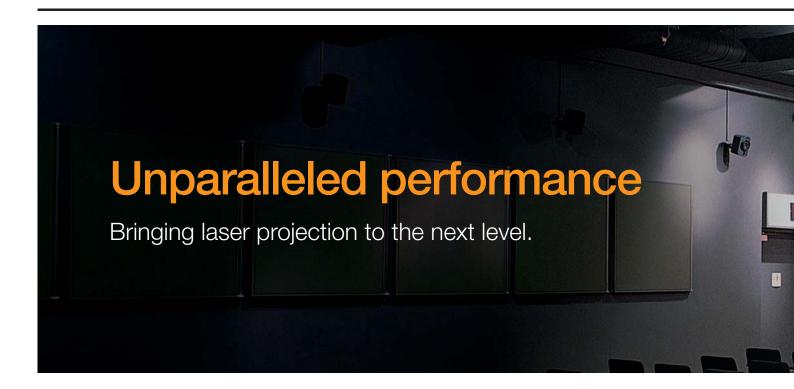


#### **Revolutionary laser light source**

Blue light from the laser is projected through a beam splitter, which divides the light into two beams. One beam is reflected by a phosphor wheel, changing it into yellow, while the other beam remains blue. The two beams are then recombined into white light and separated into red, green and blue through dichroic mirrors. Each of the three colours passes through LCD panels, producing three individual images, which are transmitted through a prism and combined into the final full-colour image.

# Inorganic LCD panels and phosphor wheel for outstanding reliability

Made of inorganic material, Epson's newly developed phosphor wheel offers superior light and heat resistance to deliver excellent reliability. By combining this with our inorganic LCD panels, we create laser projectors that project bright, vibrant images for extremely long periods.

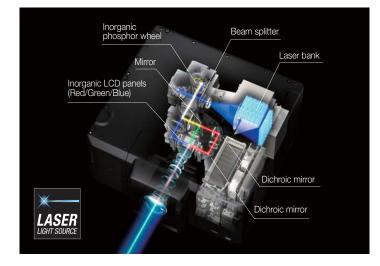

#### Organic vs. Inorganic

	Inorganic (Glass, iron, aluminum, etc.)	<b>Organic</b> (Paper, wood, plastic, etc.)
-┿҉- Light-resistance	YES	
i Heat-resistance	YES	NO

Unlike organic substances, inorganic substances do not contain carbon.

#### Worry-free projection

With multiple laser diodes to rely on, the screen won't go black even if one diode goes out. This eliminates the worry of the projector light burning out during mission-critical presentations.



The projector keeps working even when one light diode goes out.

Lamp




The screen goes black when the lamp burns out.



#### 20,000 hours of maintenance-free use

Engineered with inorganic LCD panels and an inorganic phosphor wheel, this newly designed laser light source delivers 20,000 hours\* of maintenance-free use. And with the advanced electrostatic filter having an equally long-lasting life, you enjoy peace of mind in using these highly reliable laser projectors.

\* Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m3 of particulate matter. Time varies depending on usage conditions and environments.

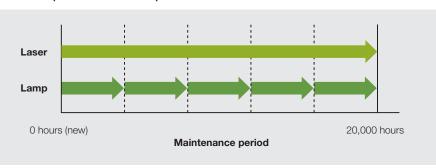

#### Maintenance period of laser and lamp

#### Well-balanced Whites

White light is created through combining the blue and yellow light beams. The advanced optical engine in the EB-L1000 series precisely adjusts the blue and yellow light to create brilliant white highlights, bringing a refreshing vibrancy to your images.



Conventional model




#### EB-L1000 Series

#### **Fine-tuning Brightness**

The EB-L1000 series provides precise brightness adjustment in increments of 1%. This combined with the Constant Brightness mode maintains brightness at a given value to match the venue or subject to deliver astonishing picture quality.

#### Custom mode with constant brightness

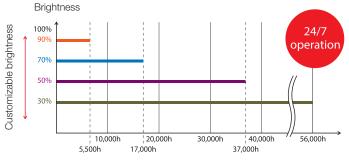

Maintenance-free hours

# Confident Colours, Greater Details

Stunning, eye-catching images that make your presentations come to life.


#### WUXGA – Beyond Full HD Resolution

With WUXGA resolution (1,920 x 1,200 pixels), you enjoy a sharp, clear display of Full HD video (1,920 x 1,080 pixels) images down to the smallest details even on large-screen projections for an incredible dynamic viewing experience.



# High-definition Images with 4K Enhancement Technology

4K enhancement technology shifts each pixel diagonally by 0.5 pixels to double the resolution to 3840 x 2160, surpassing Full HD image quality to give you unbelievable sharpness, clarity and detail on all your presentations.

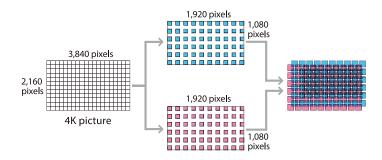


Note: This function can only be used when the input signal is 1080p or higher, and is recommended for projecting HD videos only, not documents.

#### Super-resolution Technology

Epson's super-resolution technology delivers razor-sharp images even when projecting low-resolution content onto large screens. And with image data processed frame by frame, even rapid motion remains crisp.




Super-resolution off



Super-resolution on

#### **Colour Adjustment**

With the colour adjustment function, you can easily adjust the hue, saturation and brightness for each component of RGBCMY to match your preferences.

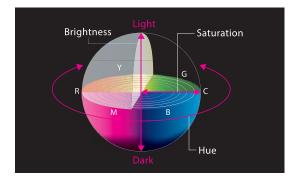




#### Auto Colour Calibration with Built-in Camera

The built-in camera detects screens that have become unevenly coloured over time, allowing the projector to automatically correct colour. It also detects subtle colour inconsistencies between multiple projectors. What's more, this function can be programmed to check colour manually or automatically at regular intervals to deliver stable image quality with minimum maintenance.

Built-in camera

#### Working image

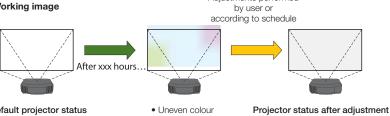


Default projector status

 Uneven colour Incorrect white balance


Adjustments performed

#### Working image when using multiple projectors



Default projector status White balance between projectors is different

Adjustments performed by user or according to schedule




 Improved colour uniformity Correct white balance

Projector status after adjustment Uniform brightness, white balance and colour between projectors

#### **Frame Interpolation**

Enjoy clearer, sharper playback even on fast-moving subjects with Epson's Frame Interpolation Technology. This unique function effectively eliminates motion blurring by inserting intermediate frames between images to create smoother motion transition.

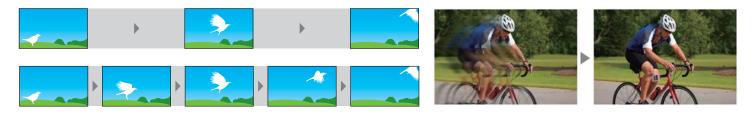

# **Adaptive Projections**


Designed with greater flexibility to fit any venue and application.

#### **Powered Lens with Stepping Motor**

The powered lens with stepping motor offers limitless possibilities in projector placement. Covering a wide range of angles, the motorised lens shift gives you a great deal of flexibility when installing the projector. The newly adopted stepping motor lets you make highly precise adjustments when employing edge blending, stacking and other techniques. Adjustments can also be made via remote control or over a network, enhancing usability even for ceiling-mounted projectors.

#### Lens-position Memory


With storage for up to 10 settings in the projector memory, including shift positions, focus and projection sizes, you can easily and quickly adjust the projector according to the aspect ratio of content simply by using either the remote controller or command control.

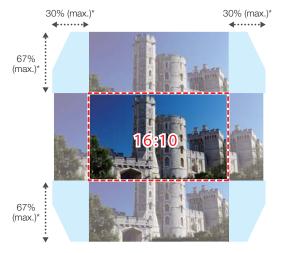

\* ±60% vertically, ±18% horizontally for EB-L1505U

#### **Extensive Lens Options**

The Epson EB-L1000 series offers an extensive line-up of optional lenses\* to fit any venue or subject. And with the new ELPLX01 zero offset, ultra-short throw lens, you can install the projector even in tight spaces.

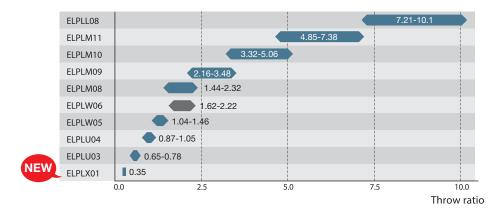

\* ELPLM08 and ELPLX01 are applicable for EB-L1100U/L1200U/L1405U only.



#### Zero Offset, Ultra-short Throw Lens

A revolutionary invention of Epson, this powerful lens is especially useful for environments with extremely limited lens-to-screen distances. The short throw ratio of 0.35 with zero-offset and the projector's front-mounted exhaust system means you can project onto 100-inch screens even from as near as 74cm away. When combined with lens shift (+17% vertically, ±10% horizontally), these features simplify usage where space is at a premium.

#### **Multi-direction Projection**

EB-L1000 series can be rotated 360° in any direction — horizontally, vertically and rotationally — without any loss in image brightness. This makes it ideal for a wide range of applications, such as projecting onto ceilings and floors.

360° rotationally



#### **Projection on Wide Curved and Corner Spaces**

Fit your projection images nicely even on non-flat surfaces. Create stunning projection images on wide curved surfaces and corner walls, ideal for advertisements and marketing promotions.



#### HIGH BRIGHTNESS LASER PROJECTORS EB-L1100U/L1200U/L1405U/L1505U

#### **Borderless Multi Projection**

Offering a variety of functions for multi-projector installations, the EB-L1000 series lets you adjust brightness, colour and the position of overlapping areas for seamless, beautiful displays. There is also an Auto Scaling function for easy multi-projector displays and an Advanced Edge Blending function for more precise edge-blending adjustment.



#### **Colour Matching/Brightness Level**

Enjoy uniform colour and brightness even when using multiple projectors.



#### **Point Correction**

Easily correct single-projector distortion or multi-projector misalignment directly on the screen. Quickly fine-tune the images by adjusting point by point from right to left, top to bottom, using a projected maximum 17 x 17 matrix.




#### Black Level

Experience uniform black levels in overlapping areas of images even when using multiple projectors.




#### Advanced Edge Blending

Precisely adjust edge blending to combine multiple edges for a seamless, unified look. This function allows you to fine-tune the start position and edge width of the blend as well as the area of the black level in the blend. It also prevents the main subject from being overlapped. As a tip, you can reduce the size of the overlapping areas to decrease the time it takes to combine multiple images.

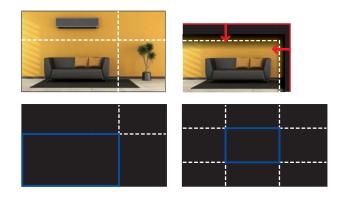

#### **Auto Scaling**


This revolutionary function simplifies the complicated scaling of images from multiple projectors so you can do it easily. Just select the screen layout from the pre-set menu and the projector automatically sets the slice area, scaling and edge-blend position.

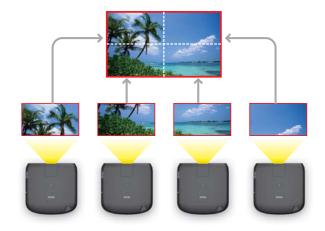

## Wide Range of Connectivity

The Epson EB-L1000 series is compatible with a wide range of external devices, and additional ports now include DVI-D, HDMI, HDBaseT and SDI\*. Ideal for large venues, HDBaseT can transmit Full HD video, audio and Ethernet at low cost through cat 5e/6 cables up to 100 metres.

\* For EB-L1405U/L1505U only.

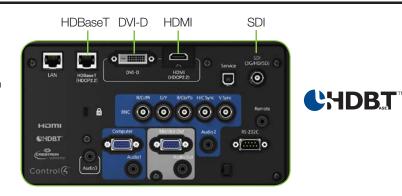


### **Ease of Maintenance**

#### EasyMP Monitor and Message Broadcasting

With Epson's network monitoring and control software, you can see from a single PC which projectors are available and whether they are running efficiently – even across the biggest network. You can configure your projectors and access their serial numbers remotely, as well as receive instant email alerts for pre-defined critical indicators such as non-functioning devices or overheating laser diode.

Now you can send messages or announcements as JPEG files simultaneously to any number of projectors on a network. This makes the EB-L1000 projector series very useful for immediate communication needs or even emergencies.

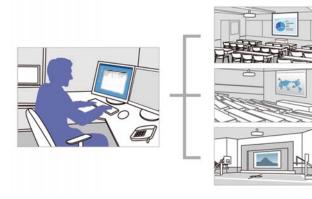


**Eco Features** 

Unpainted plastic housing reduces the environment impact

• The flame retardants used in the plastic housing do not

• Uses just 0.28W of power in standby mode

· Projector optics employ lead-free lenses



Web Control



#### DMX-ArtNet Support

The EB-L1000 series\* supports DMX-ArtNet for synchronising lighting effects such as pre-programmed sequences with audio. Items you can control include power shutter switchgear input source, lens drive (shift, focus and zoom) and lens memory settings.

\* For EB-L1405U/L1505U only.

#### **Transfer OSD Information**

Reduce installation and setup time when using multiple projectors by transferring OSD settings — such as brightness and colour settings as well as user logos — to multiple machines via USB or over a network.

# Better Products for a Better Future

For more information on Epson's environmental programmes, visit http://global.epson.com/SR/environment.

## PARTNERS IN PERFECTION

contain chlorine or bromine

#### Desktop Document Camera ELPDC21



2.6kg/6.6 lbs 1080p output resolution 2 megapixels with 30 fps 12 x optical zoom HDMI digital connectivity

#### HDBaseT Transmitter ELPHD01



HDMI Input RS232C for control LAN for Ethernet Allows Full HD uncompressed signal transmission up to 100 meters


#### WORKFORCE WF-6091 Printer



Print speeds of up to 34pp/minute 5760dpi resolution Connectivity via Wi-Fi, Wi-Fi Direct and Epson Connect

# EPSON REVOLUTIONISES PROJECTOR MARKET WITH 3LCD TECHNOLOGY AND LEADS AS WORLD'S NO.1\* PROJECTOR BRAND FOR 15 CONSECUTIVE YEARS!

# \* Based on independent research by Futuresource Consulting




The device used to change blue laser light into yellow light. The adoption of an inorganic phosphor wheel has made it durable enough to withstand the high output of a laser light source.



Newly developed, large 1.43inch panel. The adoption of an inorganic panel enhances light resistance and helps realise an even longer life.

First, blue light from the laser is projected through a beam splitter, which divides the light into two beams: One beam is reflected by a phosphor wheel, where it is changed into yellow, while the other beam remains blue. The two beams are then recombined into white light.

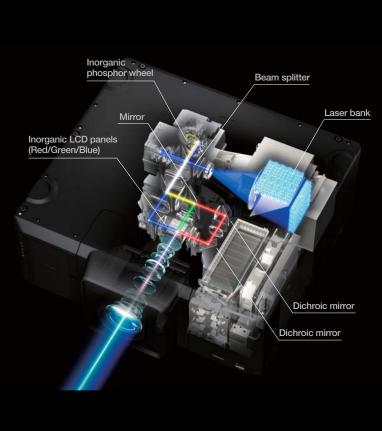




High-powered laser diodes enable to achieve the outstanding brightness-25,000lm.



A combination of liquid and air cooling was employed to achieve a cooling system.

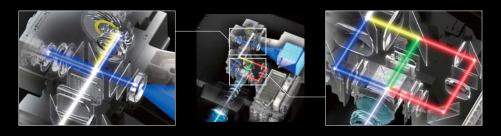

It is separated into red, green and blue through dichroic mirrors. After this, each of the three colours pass through LCD panels, producing three individual images. Lastly, these three images are transmitted through a prism and combined into the final full-colour image.




# SEE VIBRANT, REALISTIC COLOURS WITH HIGH COLOUR BRIGHTNESS.





## Up to 3X Wider Colour Gamut

Colour gamut refers to the range of colours that can be reproduced by a display device – the wider the gamut, the more realistic it is. Epson 3LCD projectors project three times wider gamut that matches closely to the original standard of a display device (sRGB), as compared to 1-chip projectors.

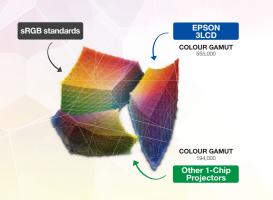

Comparing the yellow corners among the three gamuts, 1-chip projectors have a distinctly darker and smaller set of colours which are not as vibrant as Epson 3LCD projectors.



Compared against similarly-priced leading 1-chip DLP® business and education projectors based on NPD data from July 2011 through June 2012 (available) from www.npd.com). Colour brightness (colour light coupud) measured in accordance with IDMS 15.4. Actual colour brightness will vary depending on actual usage conditions, SLOD<sup>®</sup> is a registered trademark of Sakko Epson Corporation. DLP<sup>®</sup> is a registered trademark of Texas instruments, Ib.c. and It sue here does not imply any alliadion with or endorsement by them.

See colours like never before. Epson 3LCD projectors deliver brilliant colours that match its white brightness to give you balanced, realistic, and vibrant images. It's no wonder Epson projectors are the people's preferred choice.



# **Up to 3X Brighter Colours**

Epson 3LCD projectors deliver up to three times the colour brightness, effortlessly creating the same colour and white brightness, resulting in faithful images with superior colour balance.





# **No Rainbow Effect**

With 1-chip projectors, the spinning motion of the sequential colour wheels tend to cause colours to break out into distinct red, green and blue. Called the rainbow effect, this may cause users to suffer headaches with prolonged viewing. Epson projectors do not give out this effect, giving users a comfortable experience.





www.epson.com.sg/colourbrightness To learn more about 3LCD engines, visit www.3lcd.com

#### **SPECIFICATIONS** EB-L1100U/L1200U/L1405U/L1505U



MODEL NUMBER		EB-L1100U	EB-L1200U	EB-L1405U	EB-L1505U	
Projection Techno			tter projection system (3LCD)			
Specifications of	֥		(020B)			
LCD	Size	0.76" (D10)			1.03" (D10)	
	Native Resolution	WUXGA (1920 x 1200	)			
Projection Lens	ridario ridobilatori	110/10/10/10/20 x 1/200	/			
Туре		Power Zoom / Power	Focus / Power Shift			
F-Number		1.7 - 2.3			1.8 - 2.5	
Focal Length		24.02 - 38.24 mm			36.00 - 57.35 mm	
Zoom Ratio		1 - 1.6			1 - 1.61	
			-1-)			
Throw Ratio		1.45 - 2.32 (Wide to Te	ele)		1.57 - 2.56 (Wide to Tele)	
Lens Exchange		Yes				
Lens Shift Mode		Powered				
Vertical (Up/Down)		±67%			±60%	
Horizontal (Left/Right		±30% ±18%				
Lightsource	Туре	Laser Diode				
	Life (Normal / Long)	20,000 / 30,000 hours	3			
Screen Size (Proje	ected Distance)					
Zoom: Wide		50" - 300" [1.53 - 9.44	[ m]		60" - 500" [1.99 - 17.17 m	
Zoom: Tele		50" - 300" [2.48 - 15.1			60" - 500" [3.26 - 27.77 m	
Brightness*1			· · · · · · · · · · · · · · · · · · ·		I``	
White Light Output	(Normal / Eco)	6,000lm / 4,200lm	7,000lm / 4,900lm	18.000lm / 5.600lm	12,000lm / 8,400lm	
Colour Light Output		6,000lm / 4,200lm	7,000lm / 4,900lm	8,000lm / 5,600lm	12,000lm / 8,400lm	
Contrast Ratio		2,500,000:1			1	
Internal Speaker(	e)	_,000,000.1				
	5)	10/4/ 21				
Sound Output	tion	10W x 1		N/A		
Geometric Correc		450 / 000 77 7	(a) (a) the Observation (1)			
Vertical / Horizontal	Keystone		ele) (with Standard Lens)			
Auto Keystone		Yes				
Quick Corner		Yes				
Curve Surface		Yes				
Point Correction		Yes				
Corner Wall		Yes				
Connectivity						
Analog Input	D-Sub 15Pin	1 (Blue)				
	5BNC	1				
D	DVI-D	4				
Digital Input		1 (with HDCP 2.2)				
Digital Input	HDMI	1 (with HDCP 2.2)				
Digital Input		. ,	2.2)	IR, 145 x 1 (with HDCP?	.2 and Art-Net Support)	
Digital Input	HDBaseT (RX)	RJ45 x 1 (with HDCP)	2.2)	RJ45 x 1 (with HDCP2	.2 and Art-Net Support)	
	HDBaseT (RX) BNC (SDI)	RJ45 x 1 (with HDCP : N/A	2.2)	RJ45 x 1 (with HDCP2	.2 and Art-Net Support)	
Output Terminal	HDBaseT (RX) BNC (SDI) D-Sub 15Pin	RJ45 x 1 (with HDCP ) N/A 1	2.2)	RJ45 x 1 (with HDCP2	.2 and Art-Net Support)	
Output Terminal Audio Input	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack	RJ45 x 1 (with HDCP : N/A 1 3	2.2)	RJ45 x 1 (with HDCP2 1	.2 and Art-Net Support)	
Output Terminal Audio Input Audio Output	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack	RJ45 x 1 (with HDCP : N/A 1 3 1		1	.2 and Art-Net Support)	
Output Terminal Audio Input	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A	RJ45 x 1 (with HDCP N/A 1 3 1 1 (for Wireless LAN, Fi	rmware Update, Copy OSD :	1	.2 and Art-Net Support)	
Output Terminal Audio Input Audio Output Others	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B	RJ45 x 1 (with HDCP : N/A 1 3 1 1 (for Wireless LAN, Fi 1 (for Firmware Update	rmware Update, Copy OSD :	1	.2 and Art-Net Support)	
Output Terminal Audio Input Audio Output	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A	RJ45 x 1 (with HDCP N/A 1 3 1 1 (for Wireless LAN, Fi	rmware Update, Copy OSD :	1	.2 and Art-Net Support)	
Output Terminal Audio Input Audio Output Others	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B	RJ45 x 1 (with HDCP : N/A 1 3 1 1 (for Wireless LAN, Fi 1 (for Firmware Update	rmware Update, Copy OSD :	1	.2 and Art-Net Support)	
Output Terminal Audio Input Audio Output Others	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C	RJ45 x 1 (with HDCP : N/A 1 1 1 (for Wireless LAN, Fi 1 (for Firmware Update D-sub 9pin x 1	rmware Update, Copy OSD :	1		
Output Terminal Audio Input Audio Output Others Control I/O	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input	RJ45 x 1 (with HDCP : N/A 1 3 1 (for Wireless LAN, Fi 1 (for Firmware Update D-sub 9pin x 1 Stereo mini jack x 1	rmware Update, Copy OSD :	Settings)		
Output Terminal Audio Input Audio Output Others Control I/O	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless	RJ45 x 1 (with HDCP : N/A 1 3 1 (for Wireless LAN, Fi 1 (for Firmware Update D-sub 9pin x 1 Stereo mini jack x 1 RJ45 x 1 (100Mbps)	rmware Update, Copy OSD :	Settings)		
Output Terminal Audio Input Audio Output Others Control I/O Network	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless ation	RJ45 x 1 (with HDCP : N/A 1 3 1 (for Wireless LAN, Fi 1 (for Firmware Update D-sub 9pin x 1 Stereo mini jack x 1 RJ45 x 1 (100Mbps)	rmware Update, Copy OSD 5 e, Copy OSD Settings)	Settings)		
Output Terminal Audio Input Audio Output Others Control I/O Network <b>Wireless Specific</b>	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless ation	RJ45 x 1 (with HDCP : N/A 1 3 1 (for Wireless LAN, Fi 1 (for Firmware Update D-sub 9pin x 1 Stereo mini jack x 1 RJ45 x 1 (100Mbps) Optional	rmware Update, Copy OSD S p, Copy OSD Settings) s <sup>2</sup>	Settings)		
Output Terminal Audio Input Audio Output Others Control I/O Network <b>Wireless Specific</b>	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless ation	RJ45 x 1 (with HDCP: N/A 1 3 1 1 (for Wireless LAN, Fi 1 (for Firmware Update D-sub 9pin x 1 Stereo mini jack x 1 RJ45 x 1 (100Mbps) Optional IEEE 802.11b: 11Mbp	rmware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup>	Settings)		
Output Terminal Audio Input Audio Output Others Control I/O Network <b>Wireless Specific</b>	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless ation	RJ45 x 1 (with HDCP : N/A 1 3 1 (for Wireless LAN, Fi 1 (for Firmware Update D-sub 9pin x 1 Stereo mini jack x 1 RJ45 x 1 (100Mbps) Optional IEEE 802.11b: 11Mbp IEEE 802.11g: 54Mbp	mware Update, Copy OSD 5 e, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup>	Settings)		
Output Terminal Audio Input Audio Output Others Control I/O Network <b>Wireless Specific</b> Supported Speed F	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless ation	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11g: 54Mbp           IEEE 802.11g: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK/AES)	rmware Update, Copy OSD 5 e, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES)	Settings)		
Output Terminal Audio Input Audio Output Others Control I/O Network <b>Wireless Specific</b> Supported Speed F	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wireless tion	RJ45 x 1 (with HDCP:           N/A           1           3           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11g: 54Mbp           IEEE 802.11g: 54Mbp           WPA-PSK / WPA2-PS           WPA2-PSK(AES)           0 - 45 °C <32 - 113 °F	mware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES) 5> (Below 1,500m / 4,921ft)	Settings)	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network <b>Wireless Specific</b> Supported Speed F	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wireless tion	RJ45 x 1 (with HDCP:           N/A           1           3           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11g: 54Mbp           IEEE 802.11g: 54Mbp           WPA-PSK / WPA2-PS           WPA2-PSK(AES)           0 - 45 °C <32 - 113 °F	mware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES) 5> (Below 1,500m / 4,921ft)	Settings)	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network <b>Wireless Specific</b> Supported Speed F	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless ation for Each Mode	RJ45 x 1 (with HDCP:           N/A           1           3           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK(AES)           0 - 45 °C <32 - 113 °F	mware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES) 5> (Below 1,500m / 4,921ft)	1 Settings)  RJ45 x 1 (100Mbps wi 3,048m / 10,000ft (with high a	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Tempel Operating Altitude	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type A USB Type B RS-232C Remote Control Input Wireless ation for Each Mode	RJ45 x 1 (with HDCP:           N/A           1           3           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK(AES)           0 - 45 °C <32 - 113 °F	mware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES) (CTKIP/AES) (Delow 1,500m / 4,921ft) (Apple 1,500m / 4,921ft)	1 Settings)  RJ45 x 1 (100Mbps wi 3,048m / 10,000ft (with high a	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Tempel Operating Altitude Direct Power On /	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type A USB Type B RS-232C Remote Control Input Wireless ation for Each Mode	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK/AES)           0 - 40 °C <32 - 104 °F	mware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES) (CTKIP/AES) (Delow 1,500m / 4,921ft) (Apple 1,500m / 4,921ft)	1         Settings)	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Tempe Operating Altitude Direct Power On / Start-Up Period	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type A USB Type B RS-232C Remote Control Input Wireless Wireless tion For Each Mode	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PSK (AES)           0 - 40 °C <32 - 104 °F	mware Update, Copy OSD 3 p, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES) (TKIP/AES) (Below 1,500m / 4,921ft) (Again 4,921ft) (Nove 1,500m / 4,921ft) (Nove 1,500m / 4,921ft)	1         Settings)	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Temper Operating Altitude Direct Power On J Start-Up Period Cool Down Period	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wiredess dion for Each Mode	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK (AES)           0 - 45 °C <32 - 110.9	mware Update, Copy OSD 3 p, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES) (TKIP/AES) (Below 1,500m / 4,921ft) (Again 4,921ft) (Nove 1,500m / 4,921ft) (Nove 1,500m / 4,921ft)	1         Settings)	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Tempe Operating Altitude Direct Power On / Start-Up Period	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless ation for Each Mode	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK(AES)           0 - 40 °C <32 - 104 °F	mware Update, Copy OSD 3 p, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> ps <sup>2</sup> K(TKIP/AES) (TKIP/AES) (Below 1,500m / 4,921ft) (Again 4,921ft) (Nove 1,500m / 4,921ft) (Nove 1,500m / 4,921ft)	1         Settings)	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific: Supported Speed F Wireless Security Operating Temper Operating Attitude Direct Power On / Start-Up Period Cool Down Period Air Filter	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wired LAN Wired EXN Tor Each Mode	RJ45 x 1 (with HDCP:           N/A           1           3           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA-PSK / WPA2-PSK/AES)           0 - 45 °C <32 - 104 °F	mware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>-2</sup> s <sup>-2</sup> s <sup>-2</sup> s <sup>-2</sup> (TKIP/AES) (TKIP/AES) (Cover 1,500m / 4,921ft -> [Above 1,500m / 4,921ft -> [Above 1,500m / 4,921ft] (Cover 1,500m / 4,921ft) (Cover 1,500m / 4	1         Settings)	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Tempel Operating Altitude Direct Power On / Start-Up Period Cool Down Period Air Filter Power Supply Vol	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type A USB Type B RS-232C Remote Control Input Wireless tion for Each Mode	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK(AES)           0 - 40 °C <32 - 104 °F	mware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>-2</sup> s <sup>-2</sup> s <sup>-2</sup> s <sup>-2</sup> (TKIP/AES) (TKIP/AES) (Cover 1,500m / 4,921ft -> [Above 1,500m / 4,921ft -> [Above 1,500m / 4,921ft] (Cover 1,500m / 4,921ft) (Cover 1,500m / 4	1         Settings)	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Temper Operating Altitude Direct Power On / Start-Up Period Cool Down Period Air Filter Power Supply Vol Power Consumpt	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type A USB Type B RS-232C Remote Control Input Wireless Wireless ation for Each Mode f f f f Jpe Maintenance Cycle tage ion (220 - 240V)	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp:           IEEE 802.11b: 13Mbb           WPA-PSK / WPA2-PSK           WPA2-PSK/AES)           0 - 3,048 m <0 - 10,00	mware Update, Copy OSD 3 p, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> (TKIP/AES) (TKIP/AES) (Below 1,500m / 4,921ft) (Apove 1,500m / 4,921ft) (Apov	I       Settings)       IRJ45 x 1 (100Mbps will       3,048m / 10,000ft (with high at the mode)       s	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Attitude Direct Power On / Start-Up Period Cool Down Period Air Filter Power Supply Vol Power Consumpt Laser Diode (Norma	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type A USB Type B RS-232C Remote Control Input Wireless tion For Each Mode Coff G J Type Maintenance Cycle tage ion (220 - 240V) al / Eco)	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 15Mbp           VPA-PSK / WPA2-PS           WPA2-PSK / WPA2-PS           VPA2-PSK (AES)           0 - 40 °C <32 - 104 °F	mware Update, Copy OSD 5 a, Copy OSD Settings) s <sup>-2</sup> s <sup>-2</sup> s <sup>-2</sup> s <sup>-2</sup> (TKIP/AES) (TKIP/AES) (Cover 1,500m / 4,921ft -> [Above 1,500m / 4,921ft -> [Above 1,500m / 4,921ft] (Cover 1,500m / 4,921ft) (Cover 1,500m / 4	1         Settings)	th Art-Net Support) Ititude mode)] Ititude mode)] Ititude mode)]	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Temper Direct Power On Direct Power On Cool Down Period Cool Down Period Air Filter Power Supply Vol Power Consumpt Laser Diode (Norms Standby (Network C	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wiredess ation for Each Mode for For Each Mode for Eac	RJ45 x 1 (with HDCP:           N/A           1           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 15Mbp           Q-tional           UEEE 802.11b: 10Mbp           0 - 40 °C <32 - 103 °F	mware Update, Copy OSD 3 p, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> (TKIP/AES) (TKIP/AES) (Below 1,500m / 4,921ft) (Apove 1,500m / 4,921ft) (Apov	I       Settings)       IRJ45 x 1 (100Mbps will       3,048m / 10,000ft (with high at the mode)       s	th Art-Net Support)	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Temper Operating Altitude Direct Power On A Start-Up Period Cool Down Period Air Filter Power Consumpt Laser Diode (Norma Standby (Network (C Dimension Exclude)	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless attion for Each Mode rature 6 6 7 7 7 9 7 9 7 9 7 9 7 9 7 9 7 9 7 9	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK(AES)           0 - 40 °C <32 - 104 °F	mware Update, Copy OSD 3 p, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> (TKIP/AES) (TKIP/AES) (Below 1,500m / 4,921ft) (Apove 1,500m / 4,921ft) (Apov	I       Settings)       IRJ45 x 1 (100Mbps will       3,048m / 10,000ft (with high at the mode)       s	th Art-Net Support) ititude mode)] 908W / 597W	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Temper Direct Power On Direct Power On Cool Down Period Cool Down Period Air Filter Power Supply Vol Power Consumpt Laser Diode (Norms Standby (Network C	HDBaseT (FX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type B RS-232C Remote Control Input Wired LAN Wireless attion for Each Mode rature 6 6 7 7 7 9 7 9 7 9 7 9 7 9 7 9 7 9 7 9	RJ45 x 1 (with HDCP:           N/A           1           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 15Mbp           Q-tional           UEEE 802.11b: 10Mbp           0 - 40 °C <32 - 103 °F	mware Update, Copy OSD 3 p, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> (TKIP/AES) (TKIP/AES) (Below 1,500m / 4,921ft) (Apove 1,500m / 4,921ft) (Apov	I       Settings)       IRJ45 x 1 (100Mbps will       3,048m / 10,000ft (with high at the mode)       s	th Art-Net Support) Ititude mode)] Ititude mode)] Ititude mode)]	
Output Terminal Audio Input Audio Output Others Control I/O Network Wireless Specific Supported Speed F Wireless Security Operating Temper Operating Altitude Direct Power On A Start-Up Period Cool Down Period Air Filter Power Consumpt Laser Diode (Norma Standby (Network (C Dimension Exclude)	HDBaseT (RX) BNC (SDI) D-Sub 15Pin Stereo Mini Jack USB Type A USB Type A USB Type B RS-232C Remote Control Input Wireless ation for Each Mode rature / Off J Type Maintenance Cycle tage ion (220 - 240V) al / Eco) Dn / Off Standard Lens)	RJ45 x 1 (with HDCP:           N/A           1           3           1           1 (for Wireless LAN, Fi           1 (for Firmware Update           D-sub 9pin x 1           Stereo mini jack x 1           RJ45 x 1 (100Mbps)           Optional           IEEE 802.11b: 11Mbp           IEEE 802.11b: 130Mb           WPA-PSK / WPA2-PS           WPA2-PSK(AES)           0 - 40 °C <32 - 104 °F	mware Update, Copy OSD : a, Copy OSD Settings) s <sup>2</sup> s <sup>2</sup> s <sup>2</sup> k(TKIP/AES) (Cover 1,500m / 4,921ft) (Above 1,500m / 4,920m / 4,920m / 4,920m /	1       Settings)	th Art-Net Support)  th Art-Net Support)  iltitude mode)]  908W / 597W 2.3W / 0.33W	

<sup>1</sup> Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118. <sup>2</sup> Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.

<sup>3</sup> When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m3). Based on the Epson's in-house test results.

#### upplied Accessories

wer Cable wer Cable Clamp (EB-L1405U/EB-L1505U) omputer Cable (VGA Cable) emote Control with 2 x AA Battery able Cover er's Manual CDROM

#### otional Accessories

Filter: FL PAE51 ireless LAN Card: ELPAP10 uick Wireless Connection USB Key: ELPAP09 BaseT Transmitter: ELPHD01 emote Control Cable Set: ELPKC28 alling Mount: FLPMB47/FLPMB48

#### otional Lenses

tra Short Throw Lens: ELPLX01\* oom Lens: ELPLU03 / ELPLU04 / ELPLW05 / ELPLW06 / ELPLM08\* / ELPLM09 / ELPLM10 / ELPLM11 / ELPLL08

ELPLM08 and ELPLX01 are applicable for EB-L1100U/ 1200U/L1405U only.

3-L1100U / EB-L1200U



#### -L1405U / EB-L1505U



2016 Epson Singapore Pte Ltd. All Rights eserved. Reproduction in part or in whole, ithout the written permission from Epson, strictly prohibited.

SON and EXCEED YOUR VISION are gistered trademarks of Seiko Epson rporation.

other product names and other company mes used herein are for identification arboses only and are the trademarks or gistered trademarks of their respective owners.

son disclaims any and all rights in those arks. Projected images shown herein are mulations. The actual product design and ontents may vary. Specifications are subject to nange without notice and may vary between ountries. Please check with local Epson offices r more information.

ople, iPad and iPhone are trademarks of Apple c., registered in the U.S. and other countries. op Store is a service mark of Apple Inc. ndroid is a trademark of Google Inc.

Information correct as at August 2016 Please refer to our website for latest specifications.

