



Model Name **MX726 Projector**

Unique selling point

- * 4000ANSI Lumen High Brightness
- * 11000:1 High Contrast Ratio
- * Blu-ray Full HD 3D support
- * MHL Mirror The Screen Of Smart Device
- * Vertical And Horizontal Keystone

Trade Mark



Projection System	DLP
Native Resolution	XGA (1024x768)
Brightness	4000 ANSI Lumen
Contrast Ratio	11000:1
Display Color	1.07 Billion Colors
Lens	F=2.59~2.91, f=16.87~21.87mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	1.5-1.97(65"@2m)
Image Size (Diagonal)	50" ~ 300"
Zoom Ratio	1.3x
Lamp Type	280W
Lamp(Normal/Economic/SmartEco Mode)*	3000/4000/6000 hours
Keystone Adjustment	2D, Vertical & Horizontal ± 30 degrees
Projection Offset	Vertical: 128% $\pm 5\%$
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB = Reduced blanking
Horizontal Frequency	15K-102KHz
Vertical Scan Rate	23-120Hz

Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
	3D Compatibility	Frame Sequential: Up to 60Hz 720p
	(Please refer to User Manual for detailed support timing.)	Frame Packing: Up to 24 Hz 1080p
		Side by Side: Up to 24Hz 1080p
		Top Bottom: Up to 60Hz 1080p

Interface	Computer in (D-sub 15pin)	x 2
	HDMI	x2 (HDMI with MHL2.0 x1, HDMI x 1)
	MHL	x 1 (HDMI with MHL2.0)
	Monitor out	x 1
	Composite Video in (RCA)	x 1
	S-Video in	x 1
	Audio in (Mini Jack)	x 1
	Audio in (L/R)	x1
	Audio out (Mini Jack)	x 1
	Microphone in(Mini jack)	x 1
	Speaker	10W x 1
	LAN(RJ-45)	x 1 (LAN Control & LAN display)
	USB (Type A)	x 1
	USB (Type Mini B)	x 1
	DC 12V Trigger (3.5mm Jack)	x 1
	RS232 (DB-9pin)	x 1
	IR Receiver	x2 (Front+Rear)

Dimensions	Dimensions(W x H x D)	314.2x116x216.3mm (include feet)
		314.2x102x216.3mm (exclude)
	Weight	7.28 lbs (3.3 Kg)

Power	Power Supply	AC100 to 240V, 3.9A, 50 to 60 Hz
	Power Consumption	370W(Normal), 310W(Eco), Standby<0.5W

Audible Noise	37/34 dBA (Normal/Economic mode)
----------------------	----------------------------------

On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
------------------------------------	--

Picture Modes	Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2
----------------------	---


Accessories	Standard	Optional
	Carry bag	Power Cord (by region)
	Remote Control w Battery	VGA cable
	User Manual CD	QSG
	Lens Cover	Warranty Card (by region)
		Spare Lamp Kit
		Ceiling mount kit
		Carry bag
		3D Glasses

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


MX726 Projector

Distance Chart


Screen size				Distance from screen [mm]			Offset (mm)
Diagonal inch	mm	Width mm	Height mm	Min Distance	Average	Max Distance	A (mm) @ Wide mode
50	1270	1016	762	1524	1763	2002	106
60	1524	1219	914	1829	2115	2402	127
70	1778	1422	1067	2134	2468	2802	148
80	2032	1626	1219	2438	2820	3202	169
90	2286	1829	1372	2743	3173	3603	191
100	2540	2032	1524	3048	3526	4003	212
110	2794	2235	1676	3353	3878	4403	233
120	3048	2438	1829	3658	4231	4804	254
130	3302	2642	1981	3962	4583	5204	275
140	3556	2845	2134	4267	4936	5604	297
150	3810	3048	2286	4572	5288	6005	318
160	4064	3251	2438	4877	5641	6405	339
170	4318	3454	2591	5182	5993	6805	360
180	4572	3658	2743	5486	6346	7205	381
190	4826	3861	2896	5791	6698	7606	402
200	5080	4064	3048	6096	7051	8006	424
250	6350	5080	3810	7620	8814	10008	530
300	7620	6096	4572	9144	10577	12009	636

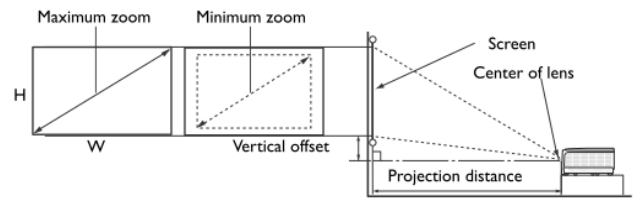

Ceiling mount Chart

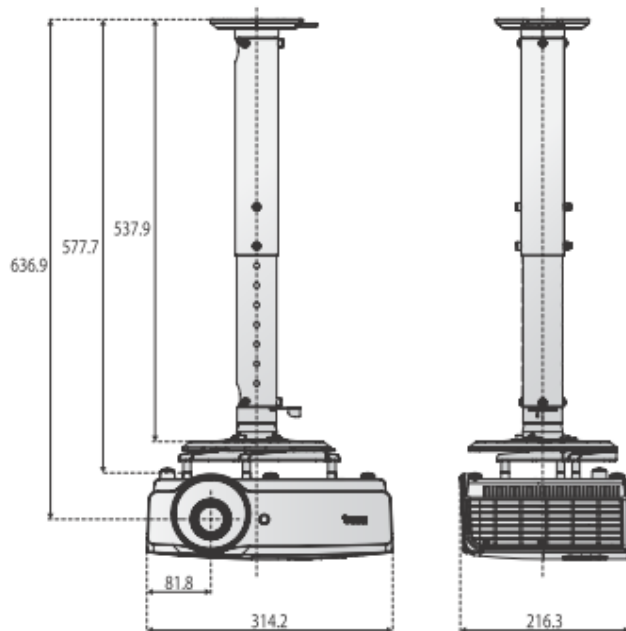

Dimension

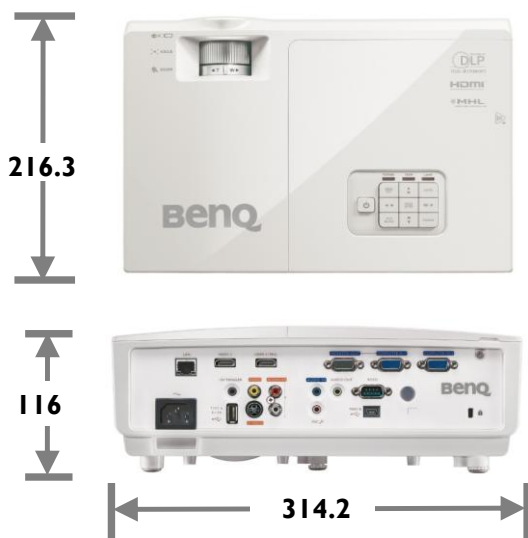

Unit: mm

PEAK
CONFERENCE
www.PeakConference.com

