

acer



PROJECTING THE FUTURE OF BUSINESS MEETING



Acer P1150

3,600 lumens brightness

Acer Bluelight Shield

Acer LumiSense

20,000:1 Dynamic Black



BluelightShield™



LUMISENSE



ColorBoost 3D



ColorSafe II

Product Specifications

| | |
|-----------------------------------|---|
| Model name | Projector P1150 |
| PN | MR.JPK11.006 |
| EAN | 4713883179539 |
| Projection system | DLP™ |
| Display Panel | 0.55" DarkChip™ 3 DMD |
| Resolution | SVGA (800 x 600) |
| Brightness | 3,600 ANSI Lumens (Standard), 2,880 ANSI Lumens (ECO) (Compliant with ISO 21118 standard) |
| Aspect ratio | 4:3 (Native), 16:9 (Supported) |
| Contrast ratio | Dynamic Black 20,000:1 |
| Throw ratio | 1.96 ~ 2.15 (50" @ 2 m) |
| Projection lens | F = 2.56 ~ 2.68, f = 22.0 mm ~ 24.1 mm Manual Zoom and Manual Focus |
| Keystone correction | +/-40° (Vertical, Manual & Auto) |
| Lamp life | 5,000 Hours (Standard), 10,000 Hours (ECO), 15,000 Hours (ExtremeEco) |
| Projection Screen Size (Diagonal) | 22" ~ 300" (56 cm – 762 cm) |
| Projection Distance | 1.0m ~ 12.0m (3.3' ~ 39.3') |
| Audio | 3W Speaker x 1 |
| Lamp Type | Osram 203W |
| Noise level | 30 dBA (Standard), 26 dBA (ECO) |
| Displayable Colors | 1.07 Billion Colors |
| Input interface | Analog RGB/Component Video (D-sub) x 2 Composite Video (RCA) x 1 HDMI (Video, Audio, HDCP) x 1 HDMI/MHL (Video, Audio, HDCPI) x 1 PC Audio (Stereo mini jack) x 1 |
| Output interface | Analog RGB (D-sub) x 1 PC Audio (Stereo mini jack) x 1 DC Out (5V/1.5A, USB Type A) x 1 |
| Control Interface | USB Ctrl (Mini-B) x 1 RS232 (D-sub) x 1 |
| Standard Accessories | AC power cord Remote control Battery for remote control Lens cap Carrying case User's guide (CD-ROM) Quick start guide Security card |
| Free | Projection Screen 70" x 70" |
| Dimensions | 299.5 x 220 x 105.1 mm (11.8" x 8.7" x 4.1", with feet) |
| Weight | 2.4 Kg (5.29 lbs) |
| Warranty | 2 Yrs parts&labor (no on-site) / Lamp 1 Yr or 1,000 hrs (any come first) |

Feature Highlights

Expressive display

- SVGA (800 x 600) – P1150
- XGA (1,024 x 768) – P1250
- 3,600 ANSI lumens
- Dynamic Black 20,000:1
- Acer BlueLight Shield
- Acer LumiSense
- Acer ColorBoost3D
- Acer ColorSafe II
- HDMI 3D with 144Hz 24p

Enhanced usability


- 3W built-in speaker – P1150
- 10W built-in speaker – P1250
- Wireless Projection¹
- AC power on
- Instant resume
- Acer SmartFormat

Installation flexibility

- Auto Keystone correction
- Auto ceiling-mounted correction
- Top-loading lamp

Eco-friendly functionality

- Acer EcoProjection
- Lamp Life up to 15,000 hours in ExtremeEco mode

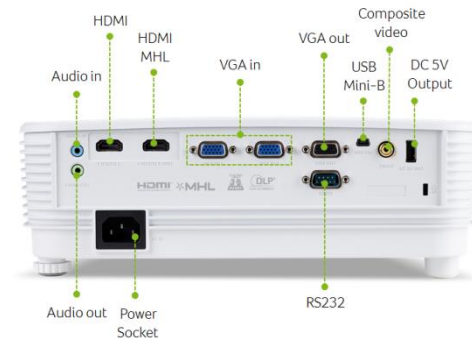

BlueLightShield™

Acer BlueLight Shield

Acer BlueLight shield allows users to lower levels of blue light to lessen the negative effects of blue light exposure. There are three levels of filter in projector suitable for different scenario. Each level also contains dynamic mechanism that will optimize the blue light level based on content. BlueLight shield can reduce up to 30% blue light and protect your eyes.



Acer LumiSense

LumiSense incorporates a clever content-aware process. It analyzes projected content frame by frame and dynamically adjusts image visibility to optimum levels. Thanks to LumiSense intelligent judgment and dynamic adjustment, all dark scenes are clearly displayed with no loss of detail.