



AUDIO WIRING CABLE

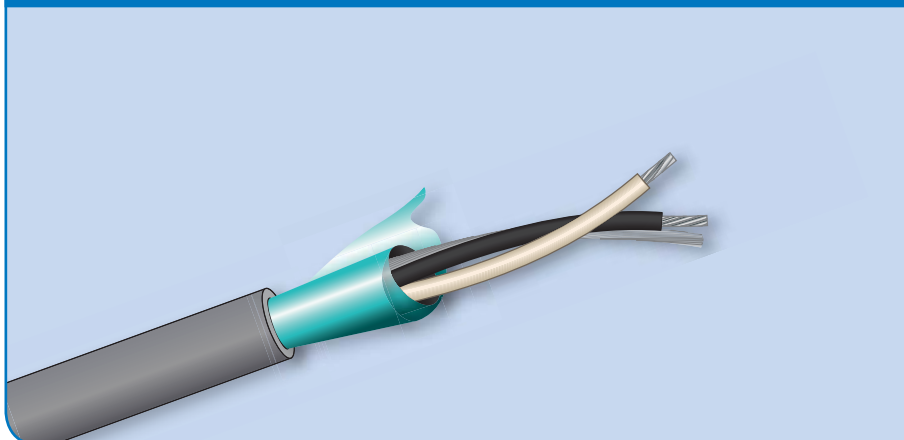

GENERAL CHARACTERISTICS

Model		APH-AWIR022	APH-AWIR018
Cable	O.D.	4.5mm±0.15mm	5.7mm±0.15mm
	Standard reels	100m / 300m	100m
	Weight (kg/100m)	3.00kg/100m	5.00kg/100m
	Operating temperature	60 °C	-20 °C~+80 °C
Jacket	Material	PVC	
	Color	Grey	
	Nom. Thick.	0.65mm	
Shield	Material	Foil & Drain Wire	
	Coverage	125%	
Conductor	Q'ty	2	
	Strand	7 x 0.254mm	16 x 0.254mm
	Area / AWG	22AWG	18AWG
	Insul. O.D.	1.6mm±0.1mm	2.1mm±0.1mm
	Material	Tinned Copper Wire	

ELECTRICAL CHARACTERISTICS

Dielectric Strength (V AC/min.)		1000V AC/0.15sec MIN	
D.C.R. at 20 °C	Conductor (Ω /100m)	5.3 Ω /100M	2.09 Ω /100M
	Shield (Ω /100m)	5.3 Ω /100M	4.2 Ω /100M
Capacitance	CDR/CDR 1 kHz (pF/m)	55pF/m±5pF	85pF/m±5pF
	CDR/SCR 1 kHz (pF/m)	61pF/m±5pF	80pF/m±5pF
Nominal Impedance 1 kHz (Ω /100m)		81 Ω /100m	68 Ω /100m