



## AUDIO WIRING CABLE

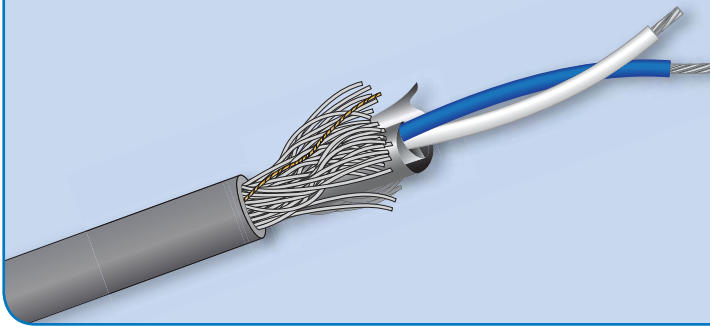

### GENERAL CHARACTERISTICS

Model	APH-AWIR025	
Cable	O.D.	3.2mm±0.1mm
	Standard reels	100M / 300M
	Weight (kg/100m)	1.8kg/100m
	Operating temperature	60 °C
Jacket	Material	PVC
	Color	Grey
	Nom. Thick.	0.6mm±0.05mm
Spiral Shield	Material	Tinned Copper Wire
	Coverage	>90%
Foil Shield	Material	Foil
	Coverage	125%
Conductor	Q'ty	2
	Strand	30 x 0.1mm
	Area / AWG	25AWG
	Insul. O.D.	1.1mm±0.1mm
	Material	Tinned Copper Wire + Tinsel Wire

### ELECTRICAL CHARACTERISTICS

Dielectric Strength (V AC/min.)		1000V AC/0.15sec MIN
D.C.R. at 20 °C	Conductor ( $\Omega$ /100m)	7 $\Omega$ /100M
	Shield ( $\Omega$ /100m)	3 $\Omega$ /100M
Capacitance	CDR/CDR 1 kHz (pF/m)	165pF/m±5pF
	CDR/SCR 1 kHz (pF/m)	283pF/m±5pF
Nominal Impedance 1 kHz ( $\Omega$ /100m)		31 $\Omega$ /100m