

DIGITAL
PROJECTOR

MW883UST




Features

- Native WXGA (1280x800) resolution
- 3,300 ANSI lumens
- 10,000:1 high contrast ratio
- HDMI x 2, MHL
- Optional PointWrite interactive capability
- Wall mount bundle



Input and Output Terminals

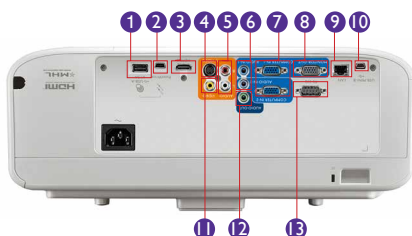

- | | |
|---------------------------------|-----------------------------|
| 1 USB (Type A) | 8 Monitor out (D-sub 15pin) |
| 2 PointWrite | 9 LAN (RJ45) |
| 3 USB (Type A) | 10 USB (Type Mini B) |
| 4 HDMI-1 | 11 Composite Video in (RCA) |
| 5 S-Video in (Mini DIN 4pin) | 12 Audio out (Mini Jack) |
| 6 Audio L/R in (RCA) | 13 RS232 (DB-9pin) |
| 7 Computer in 1/2 (D-sub 15pin) | |

Specifications

Projection System	DLP®
Native Resolution	WXGA(1280 x 800)
Brightness	3,300AL
Contrast Ratio	10,000:1
Display Color	1.07 Billion Colors
Lens	F2.4 f=3.35mm
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)
Throw Ratio	0.23
Image Size	86"-140"
Zoom Ratio	Fixed
Lamp Type	240W
Lamp (Normal/Economic Mode)*	3000/4000/6000 hours
Keystone Adjustment	2D, Vertical +/- 30 degrees, Horizontal +/-25 degree
Projection Offset	115%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	15~102KHz
Vertical Scan Rate	23~120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin) x 2 (Shared with Component) Monitor out x 1 Composite Video in (RCA) x 1 S-Video in x 1 HDMI/ MHL x 2 (HDMI 2 with MHL) Audio in (Mini Jack) x 1 Audio out (Mini Jack) x 1 Audio in (L/R) x 1 Speaker 10W x 2 USB (Type Mini B) x 2 (USB display/Service/PointWrite) USB (Type A) x 2 (USB reader/5V1.5A Power Supply) RJ45 x 1 (LAN Control / LAN Display/ Service) RS232 (DB-9pin) x 1 IR Receiver x1 (Front)
Dimensions (WxHxD)	15.15" x 5.98" x 16.88" (385 x 152 x 429 mm)
Weight	13.6 lbs (6.2 kgs)
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	Typical 410W, Network Standby <6W, Standby <0.5W
Audible Noise	37/33 dBA (Normal/Economic mode)
Languages	(28 Languages)
Picture Mode	Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable, Wall Mount Kit
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JDM05.001 3D Glasses P/N: 5J.J9H25.001 PointWrite Kit (PW02U) P/N: TBD PointWrite Pen Only P/N: 5J.J9A26.001 Touch Module PT02 P/N: 5J.J8L26.11E
UPC / Part #	8400460-3252-4 / 9H.JDN77.14A
Limited Warranty	3 Years Parts/Labor; 1 Year or 2,000 hours of lamp life

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



BenQ America Corp.
www.BenQ.us

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.


MW883UST_20160115_BQus



Because it matters

MW883UST Digital Projector


Distance Chart

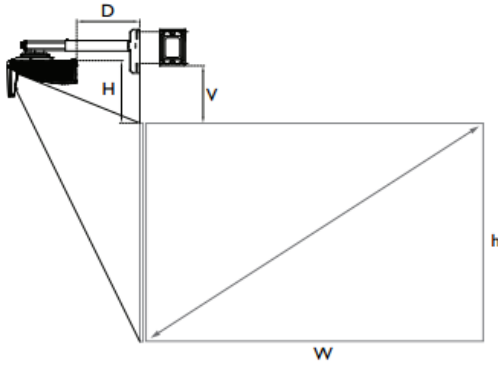

Diagonal <M>		Screen Size		Min Ceiling height	Vertical offset	Installation distance (D)	
		Height <h> (inch)	Width <W> (inch)	H ^a (inch)	V (inch)	X ^b = 0 inch (D=a)	X ^c = 30 inch (D=a+30 inch)
Inch	mm					(inch)	(inch)
86.5	2197	45.6	73	95.6	8.5	3.4	4.6
87	2210	46.1	73.7	95.9	8.5	3.5	4.7
90	2286	47.7	76.3	97.8	8.7	4.1	5.3
95	2413	50.3	80.5	100.8	9.1	5.1	6.3
100	2540	52.9	84.8	103.8	9.5	6.1	7.3
105	2667	55.6	89.0	106.9	9.9	7.1	8.3
110	2794	58.3	93.2	110.0	10.3	8.1	9.2
115	2921	60.9	97.5	113.0	10.7	9.1	10.2
120	3048	63.5	101.7	116.1	11.1	10.0	11.2
125	3175	66.2	105.9	119.1	11.5	11.1	12.2
130	3302	68.8	110.2	122.2	11.9	12.0	13.2

Ceiling Mount Chart

Units: inch

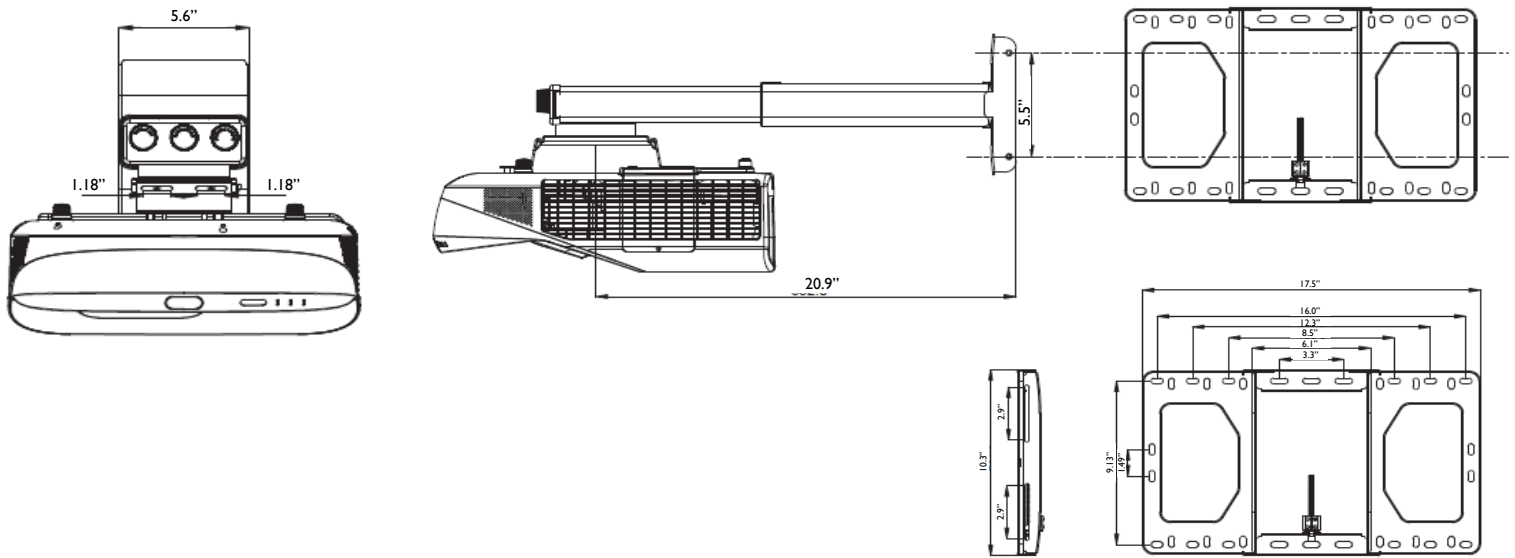

Ceiling Mount Chart

Units: inch

