

Model Name

MX525 Digital Projector

Unique Selling Point

- * SmartEco Power Saving technology
- * Up to 10,000 hours Long lamp life
- * <0.5W standby mode
- * Blu-ray Full HD 3D support

Trade Mark




| | | |
|---|---|----------------|
| Projection System | DLP | |
| Native Resolution | XGA (1024 x 768) | |
| Brightness | 3200AL | |
| Contrast Ratio | 13000:1 | |
| Display Color | 1.07 Billion Colors | |
| Lens | F=2.56-2.8, f=21-23.1 mm | |
| Aspect Ratio | Native 4:3 (5 aspect ratio selectable) | |
| Throw Ratio | 1.86-2.04 (53"@2m) | |
| Image Size (Diagonal) | 36"~300" | |
| Zoom Ratio | 1.1:1 | |
| Lamp Type | 190W | |
| Lamp Mode (Normal/Eco/SmartEco/LampSave)* | 4500/6000/6500/10000 hours | |
| Keystone Adjustment | 1D, Vertical +/- 40 degrees | |
| Projection Offset | 120% ±5% | |
| Resolution Support | VGA(640 x 480) to UXGA(1600 x 1200) | |
| Horizontal Frequency | 15~102KHz | |
| Vertical Scan Rate | 23~120Hz | |
| Compatibility | HDTV Compatibility 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility NTSC, PAL, SECAM 3D Compatibility Frame Sequential: Up to 720p (Please refer to User's Frame Packing: Up to 1080p Manual for detailed support Side by Side: Up to 1080i/p timing.) Top Bottom: Up to 1080p | |
| Interface | Computer in (D-sub 15pin) x 2 (Shared with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 1 Audio in (Mini Jack) x 1 Audio out (Mini Jack) x 1 Speaker 2W x 1 USB (Type mini B) x 1 RS232 (DB-9pin) x 1 IR Receiver x 1 (Front) | |
| Dimensions | Dimensions(W x H x D) 283 x 95 x 222 mm (with feet) 283 x 88.7 x 222 mm (without feet) Weight 1.9kg | |
| Power | Power Supply AC100 to 240 V, 50 to 60 Hz Power Consumption Normal 270W, Eco 220W, Standby<0.5W | |
| Audible Noise | 33/28 dBA (Normal/Economic mode) | |
| On-Screen Display Languages | Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) | |
| Picture Modes | Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 | |
| Accessories | Standard | Optional |
| | Remote Control w/ Battery | Spare Lamp Kit |
| | Power Cord (by region) | Ceiling Mount |
| | UM Download Instruction and Regulatory Statements | 3D Glasses |
| | Quick Start Guide | Carry bag |
| | Warranty Card (by region) | |
| | VGA(D-sub 15pin) Cable | |

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

MX525 Digital Projector

Distance Chart


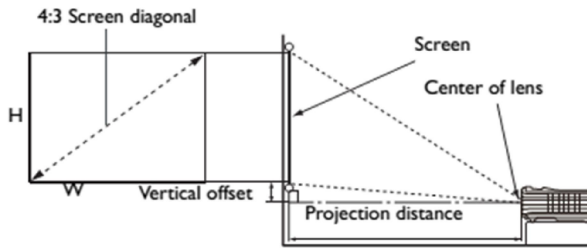


The screen aspect ratio is 4:3 and the projected picture is in a 4:3 aspect ratio


| Screen size | | | | Distance from screen (mm) | | | Vertical offset (mm) |
|-------------|------|--------|--------|---------------------------|---------|-------------|----------------------|
| Diagonal | | W (mm) | H (mm) | Min length | Average | Max length | |
| Inch | mm | | | (max. zoom) | | (min. zoom) | |
| 30 | 762 | 610 | 457 | 1132 | 1189 | 1245 | 46 |
| 40 | 1016 | 813 | 610 | 1509 | 1585 | 1660 | 61 |
| 50 | 1270 | 1016 | 762 | 1887 | 1981 | 2075 | 76 |
| 60 | 1524 | 1219 | 914 | 2264 | 2377 | 2491 | 91 |
| 80 | 2032 | 1626 | 1219 | 3019 | 3170 | 3321 | 122 |
| 100 | 2540 | 2032 | 1524 | 3774 | 3962 | 4151 | 152 |
| 120 | 3048 | 2438 | 1829 | 4528 | 4755 | 4981 | 183 |
| 150 | 3810 | 3048 | 2286 | 5660 | 5943 | 6226 | 229 |
| 200 | 5080 | 4064 | 3048 | 7547 | 7925 | 8302 | 305 |
| 250 | 6350 | 5080 | 3810 | 9434 | 9906 | 10377 | 381 |
| 300 | 7620 | 6096 | 4572 | 11321 | 11887 | 12453 | 457 |

Wall mount/Ceiling mount Chart

Ceiling Mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

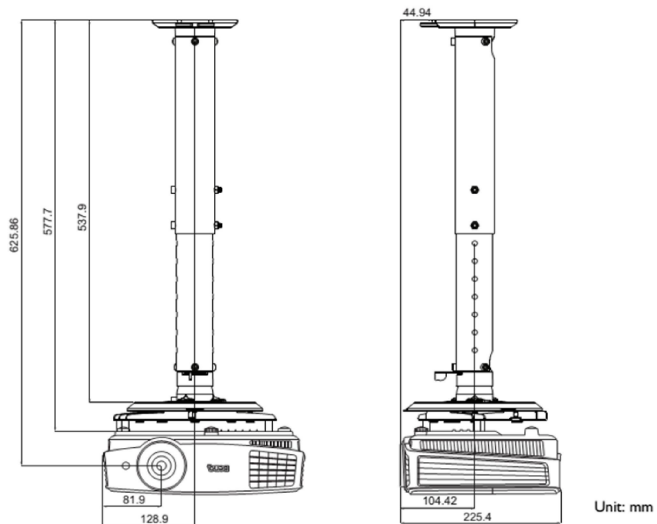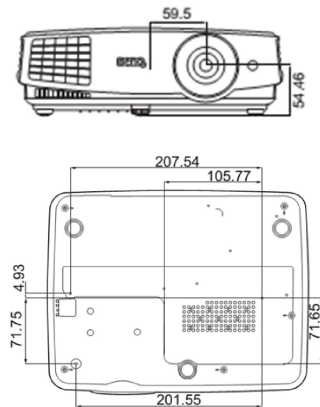

Dimension

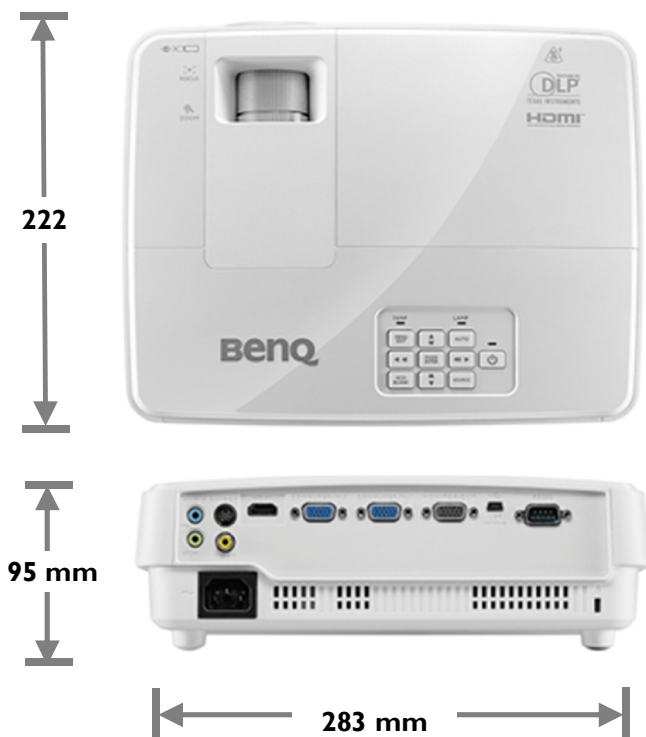

PEAK
CONFERENCE
www.PeakConference.com

