



## MICROPHONE CABLE

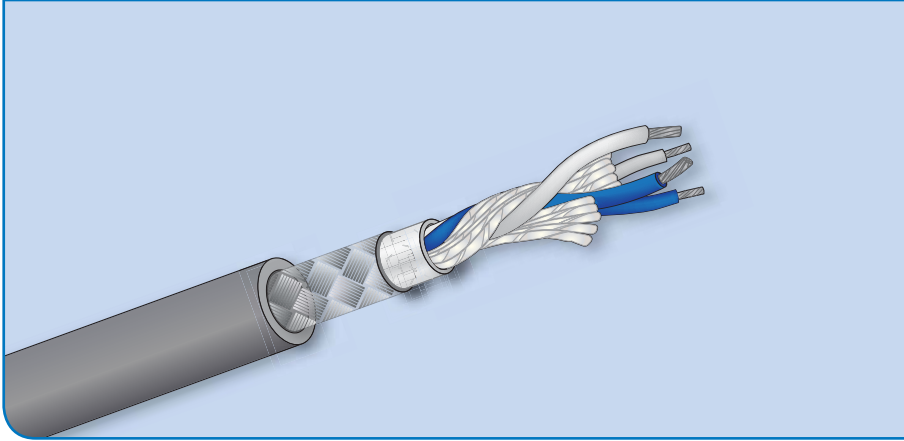

### GENERAL CHARACTERISTICS

Model	APH-A4P6H	
Cable	O.D.	6.0±0.15mm
	Standard reels	200m
	Weight (kg/100m)	5.30kg/100m
	Operating temperature	60 °C
Jacket	Material	PVC
	Color	Gray
	Nom. Thick.	1.14mm
Braid Shield	Material	Braid
	Coverage	95%
Paper Shield	Material	Paper
	Coverage	125%
Conductor	Q'ty	4
	Strand	40 x 0.08mm
	Area / AWG	24AWG
	Insul. O.D.	1.4mm ± 0.1mm
	Material	Tinned Copper Wire

### ELECTRICAL CHARACTERISTICS

Dielectric Strength (V AC/min.)		1000V AC/0.15sec MIN
D.C.R. at 20 °C	Conductor ( $\Omega/100m$ )	8.42 $\Omega/100M$
	Shield ( $\Omega/100m$ )	1.49 $\Omega/100M$
Capacitance	CDR/CDR 1 kHz (pF/m)	45pF/m±5pF
	CDR/SCR 1 kHz (pF/m)	53.5pF/m±5pF
Nominal Impedance 1 kHz ( $\Omega/100m$ )		88 $\Omega/100m$